

# WATERPROOF FEMALE CRIMP TERMINAL



## 3232 SERIES. 2.00 mm. (0.079") Pitch housing.

### General Features

- Accommodates wire range AWG 22 through 26
- Use in waterproof housing 2.00 mm. 3230-2xx1 series
- Contact with tin plated locking lance
- Maximum insulation diameter 1.70 mm (0.067")

### Materials

- Contact: Phosphor bronze
- Operating temperature -40°C to +85°C


### Dimensional Information

### Electrical Features

- Current rating: < 3 A
- Contact resistance: < 20 mΩ

### Mechanical Features

- Durability: 25 cycles
- Wire pull-out force:
  - 4.00 Kg 22 AWG
  - 3.00Kg 24 AWG
  - 2.00 Kg 26 AWG

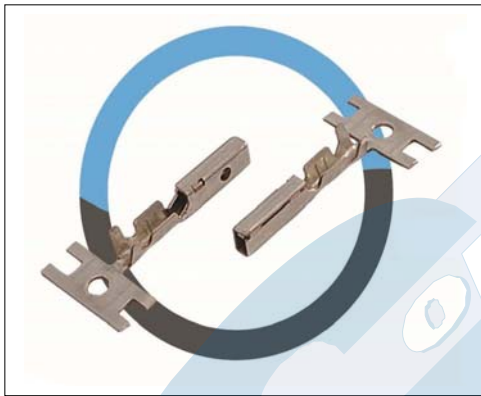

**3232 - 2- 00- E**

1 2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose piece

