

SIM CARD SOCKET 6 AND 8 CONTACTS



2440 SERIES. SIM card socket. Hinge Type.



General Features

- Available in 6 and 8 contacts
- Accept SIM card 6 and 8 contacts
- Contact area: different gold plating over 50 μ nickel
- Solder area: tin plating over 50 μ nickel
- Without card detect
- Stand-off: 0 mm.

Materials

- Insulator: LCP UL 94 V-0
- Contact: Phosphor Bronze
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimensional Information

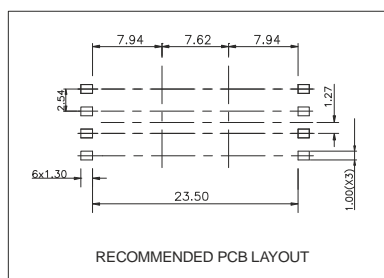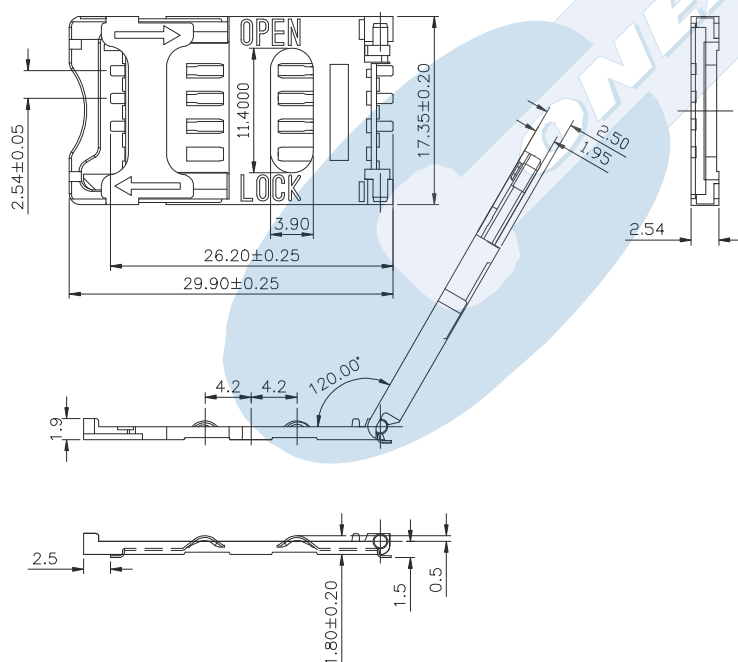


Electrical Features

- Voltage rating: < 50 V
- Current rating: < 0.50 A
- Contact resistance: < 30 m Ω
- Dielectric withstanding voltage: 500 V AC/minute
- Insulation resistance: >1000 M Ω

Mechanical Features

- Durability: 5.000 cycles

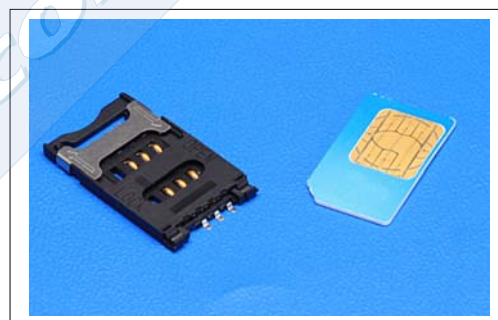

2440 - T- XX- E

1 2 3 4

1. Series

2. Plating Options

- T = 16. 30 μ " selec. gold over nickel
Recommended Finish

3. Number of circuits

- Available in 6 and 8 circuits

5. Packing Options

- E = 1. Tube
- E = 2. Reel