

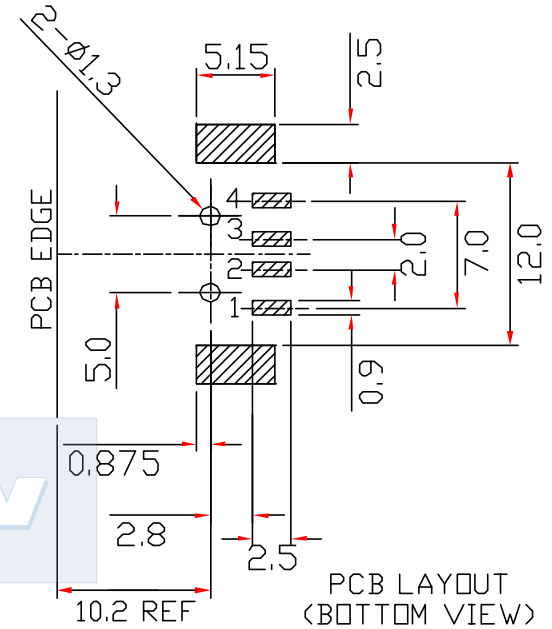
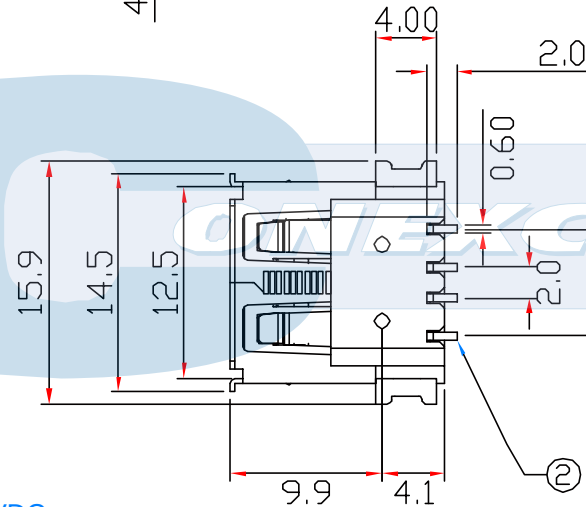



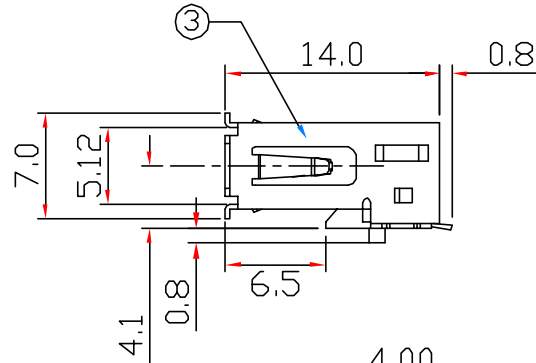

Specification:
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min. At 500VDC.
Rated Voltage And Current: 1.5A At 250VAC Minimum.
Dielectric Withstanding Voltage:
 750V AC (rms) for 1 Minute(Rev. 1.1)
Durability (Life Test): 1500 Cycles
Insertion Force: 35 Newton Maximum.
Extraction Force: 10 Newton Minimum.

Part Number: 5610-T041

N0.	NAME	MATERIAL	FINISH	REMARK	QTY
1	HOUSING	NYLON PA9T G.F.	BLACK		1
2	PIN TERM.	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)	4
3	SHELL	BRASS T:0.3	NICKEL PLATED	NI:50u" MINIMUM.	1

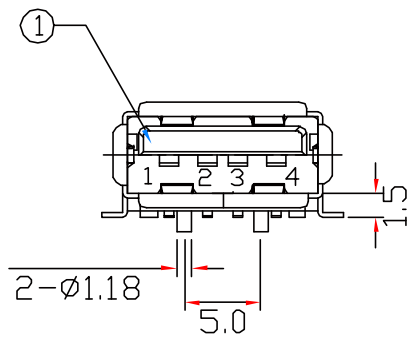

COMPUTER NO.			UNIT	SCALE	PART NAME		
D:\DWG\KS-001FC-A1NB-L			mm	1:1	USB A TYPE FLAT SMT 4 PIN SOCKET		
APPD.	CKD.	DWG.	DATE	TOLERANCE	PART NO.		REV.
		TINA	07-04-10	X. ±0.38 X ±0.25 XX ±0.13 XXX ±0.05			A

MODEL

SERIES: 5610

PAGE 1 OF 1