

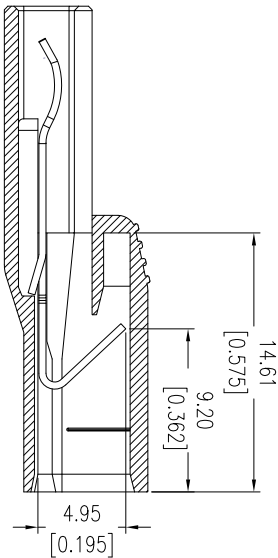
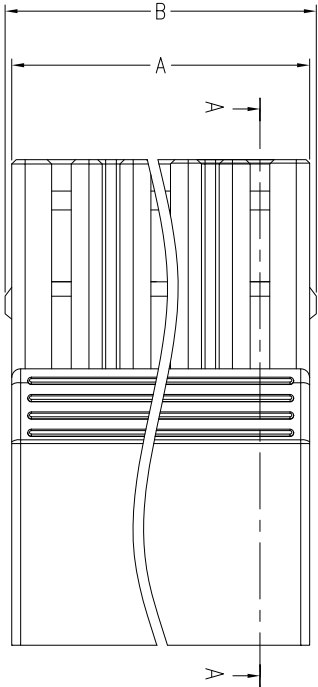
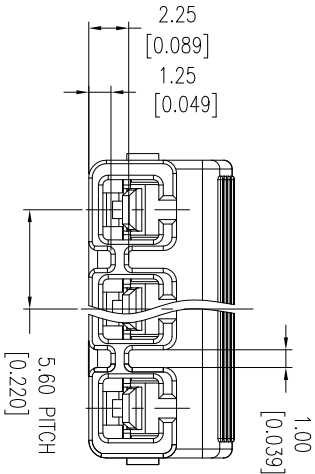


HSF

NOTES:
Rated Current:3.0 AMP @120V.
Contact Resistance:30mΩ Max.
Withstand Voltage:600V MAX.
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃
-Solid Wire: 18 AWG
-Tin Bonded: 18 AWG(≤16 Strand)
Contact Material:Phosphor Bronze(C5191)
Contact Plating: Sn over Ni
Main Body Material: PA66 UL94V-0

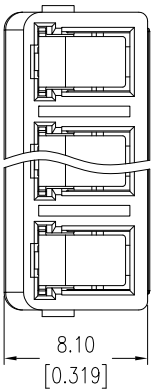

SECTION A-A

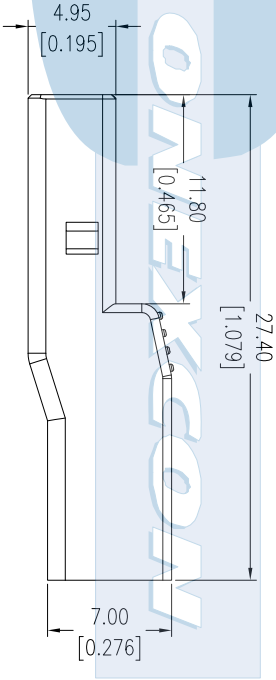

Ordering Information:

5820 - T- XX- 1

1 Connector Series


2 (T) Contact Plating

● T = 2. Tin plated (Recommended Finish)

3. (XX) Number of circuits

● Available in 2 and 3 circuits

		OPERATION		DRAW		DATE		SCALE		PART NO.	
			X.X	JYHuang		2015/12/07		UNIT		5820 Series	
			±0.40					mm			
A1	2015/12/07	ADD DIM. TABLE	X.XX	CHECK		DATE		SIZE		LED CONN.MALE L=27.40	
			X.XXX					A4			
A0	2015/06/15	NEW	±0.15					SHEET		Customer NO.	
			Angle	APPROVE		DATE		1/1			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL						
						TITLE:					
						Customer NO.					



3	16.60 [0.654]	17.40 [0.685]
2	11.20 [0.441]	11.95 [0.470]
PIN	A	B

