

SOCKET PLUGGABLE SPRING



BC0225SNLP* SERIES. 3.50 mm. (0.138").

General Features

- Available in 2 through 24 circuits
- Ultra-thin housing and easy pluggable style
- Mates with 3.50 mm. pitch plugs pluggable terminal blocks BC0225S
- Full polarised. Low profile (6.10 mm.)
- Front or side wire entry. Meet UL 1059 requirements

Materials

- Insulator: PA66 UL 94 V-0.
- Contact: bronze tin plated
- Operating temperature: -40°C to +120°C
- RoHS compliant


Dimension Information

Electrical Features

- Voltage rating: 300V UL / 320V IEC
- Rated current: 8 A UL / 10 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1300V UL / 4000 V IEC
- Insulation resistance: >500 MΩ


Mechanical features

- Durability: 25 cycles

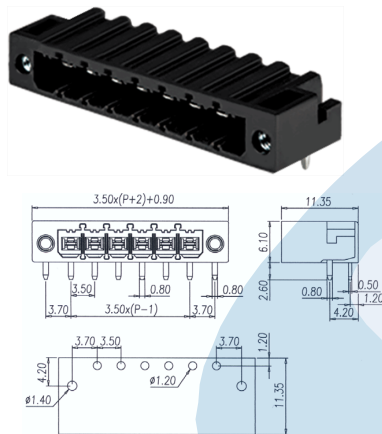


P/N: BC022516-XX-TH

XX= N° CONTACTS

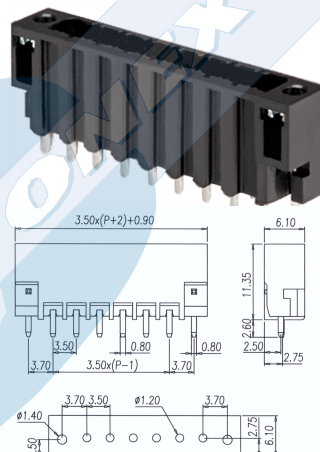


P/N: BC022517-XX-TH

XX= N° CONTACTS

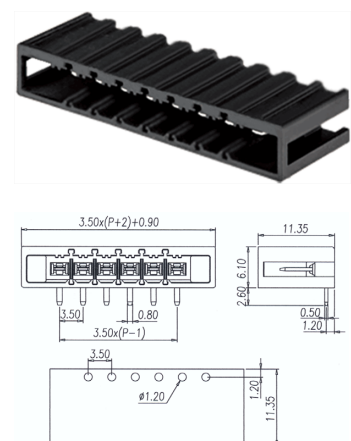


P/N: BC022526-XX-TH

XX= N° CONTACTS

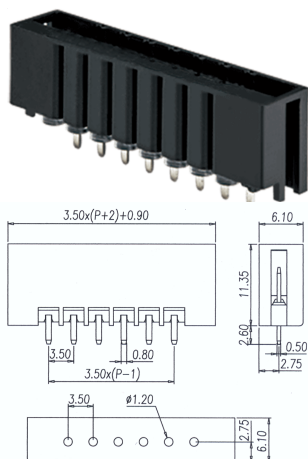


P/N: BC022527-XX-TH

XX= N° CONTACTS

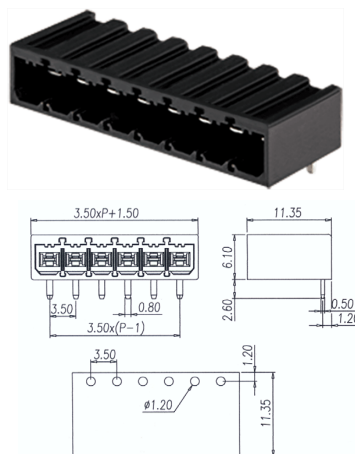

P/N: BC022536-XX-TH

XX= N° CONTACTS

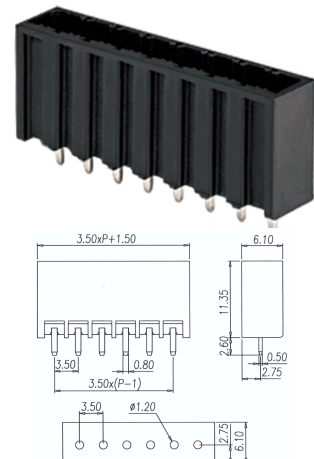

P/N: BC022537-XX-TH

XX= N° CONTACTS