

# MALE TERMINAL BLOCK





## BC3EHD\*\* SERIES. 7.62 mm. (0.200").

### Features

- Available in 2 through 12 circuits.
- Available fully shrouded or with open side .
- Mates with BC3ESD\*\* female connector.
- Contact: Square pin in brass 1.00 x 1.00 mm.
- Plastic: PA66, V-0.
- Insulation Resistance: 500 megaohms.
- Withstanding voltage: 1.500 V AC/min.
- Temperature rating: -40° - 105°C
- Voltage rating: 300 V.
- Current rating: 15A



### OPEN SIDE MALE

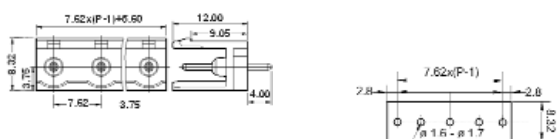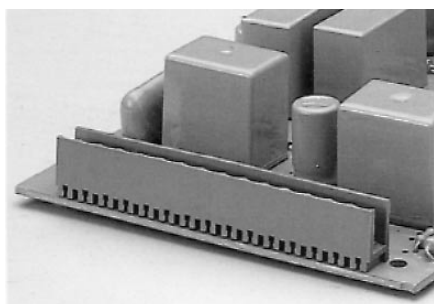

MECANIZADO RECOMENDADO

Part Number: **BC3EHDV-XX-P**  
XX=Nº of contacts



### FULLY SHROUDED MALE

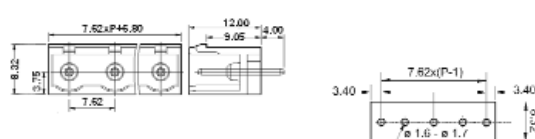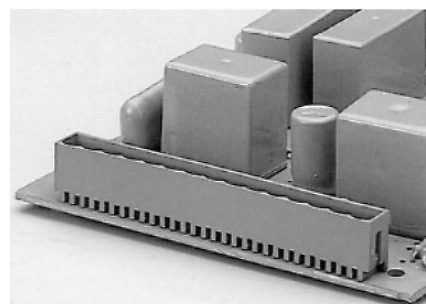

MECANIZADO RECOMENDADO

Part Number: **BC3EHDVC-XX-P**  
XX=Nº of contacts



### RIGHT ANGLE OPEN SIDE MALE

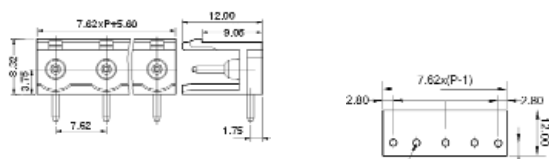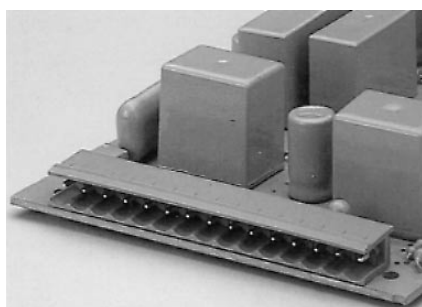

MECANIZADO RECOMENDADO

Part Number: **BC3EHDR-XX-P**  
XX=Nº of contacts

### RIGHT ANGLE FULLY SHROUDED MALE

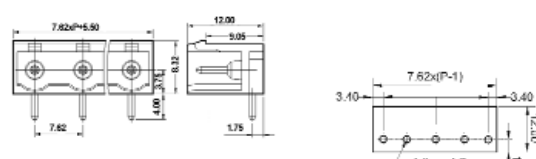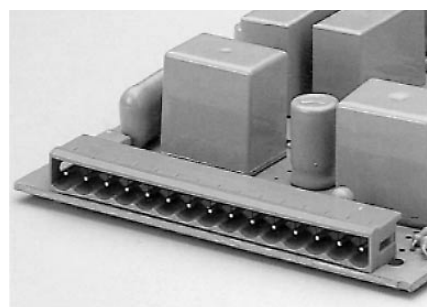

MECANIZADO RECOMENDADO

Part Number: **BC3EHDRC-XX-P**  
XX=Nº of contacts