

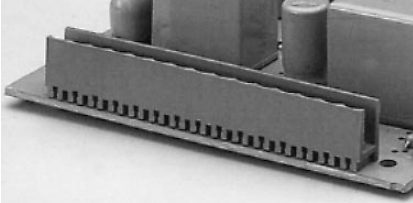

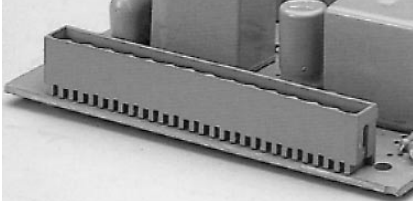

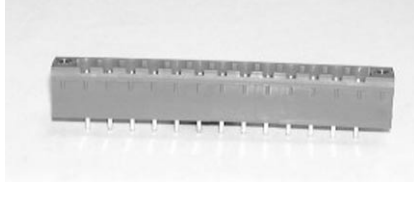
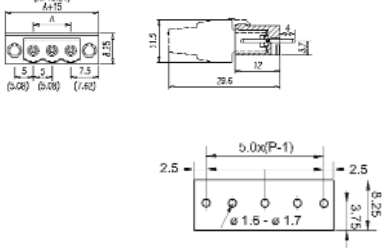
# MALE TERMINAL BLOCK

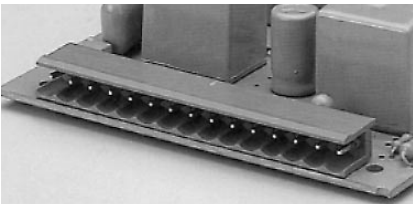

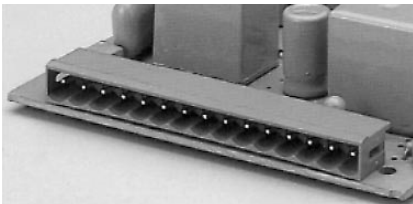

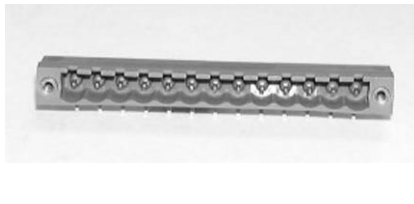
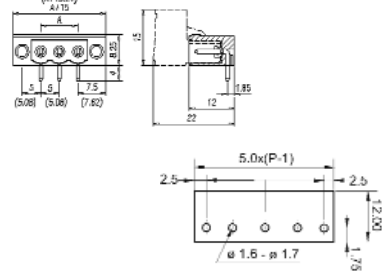


## BC5EHD\*\* SERIES. 5.00 mm. (0.197"). For PCB solder.

### Features

- Available in 2 through 24 circuits.
- Available fully shrouded or with open side .
- Mates with BC5EHD\*\* female connector.
- Contact: Square pin in brass 1.00 x 1.00 mm.
- Plastic: PA66, V-0.
- Insulation Resistance: 500 megaohms.
- Withstanding voltage: 1.500 V AC/min.
- Temperature rating: -40° - 105°C
- Voltage rating: 300 V.
- Current rating: 15A

OPEN SIDE MALE	FULLY SHROUDED MALE	F/ S MALE WITH FIXING SYST.
  <p>MECANIZADO RECOMENDADO</p> <p>Part Number: <b>BC5EHDV-XX-P</b> XX=Nº of contacts</p>	  <p>MECANIZADO RECOMENDADO</p> <p>Part Number: <b>BC5EHDVC-XX-P</b> XX=Nº of contacts</p>	  <p>MECANIZADO RECOMENDADO</p> <p>Part Number: <b>BC5EHDVM-XX-P</b> XX=Nº of contacts</p>

R/ ANGLE OPEN SIDE MALE	R/ ANG FULLY SHR. MALE	F/ S MALE WITH FIX SYST.
  <p>MECANIZADO RECOMENDADO</p> <p>Part Number: <b>BC5EHDR-XX-P</b> XX=Nº of contacts</p>	  <p>MECANIZADO RECOMENDADO</p> <p>Part Number: <b>BC5EHDRC-XX-P</b> XX=Nº of contacts</p>	  <p>MECANIZADO RECOMENDADO</p> <p>Part Number: <b>BC5EHDRM-XX-P</b> XX=Nº of contacts</p>