
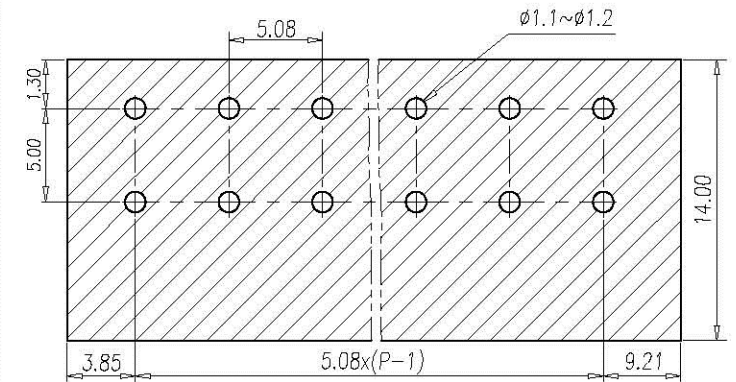
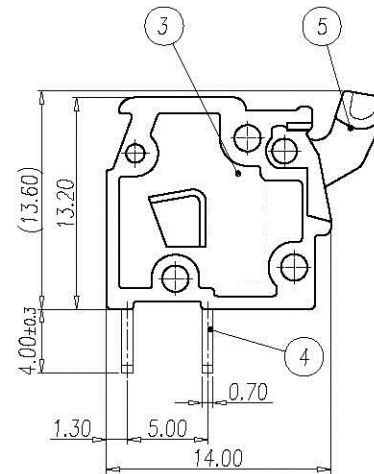
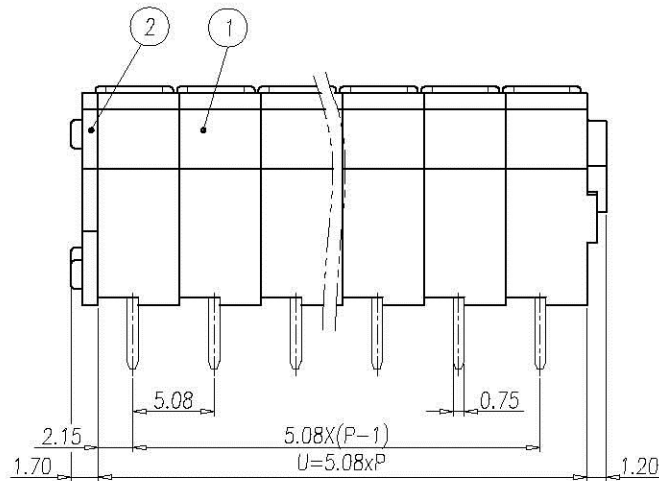


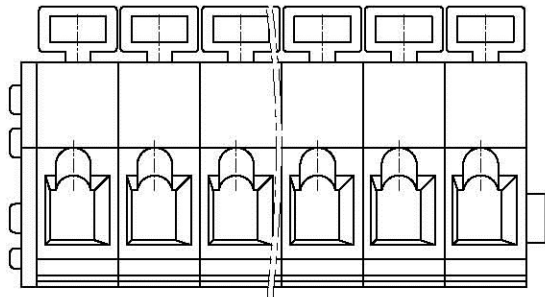


P.C.B. LAYOUT(REF)

NOTES:

1. Rating: 300V 15A(IEC 450V 24A)
PITCH: 5.08 mm
2. Insulation Withstands Voltage:
AC 2500V at 1 minute
3. Insulation Resistance:
1000MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Suitable Electric Wire:
28~12 AWG (IEC 0.5~2.5mm²)
6. RoHS Compliance.

Normal Geometric Tolerancing					
— //		≡		⊥	
0 to 100	0.2	0.3	0 to 10	0.2	
over 100 to 150	0.3		over 10	0.3	
over 150	0.5				
Total Pitch Tolerances		Normal dimension Tolerances			
0<U<=30	±0.20	0~30	±0.25		
30<U<=53	±0.25	over 30~53	±0.30		
53<U<=70	±0.30	over 53~70	±0.35		
70<U<=90	±0.35	over 70~90	±0.44		
90<U<=115	±0.44	over 90~115	±0.55		
115<U<=150	±0.55	over 115~150	±0.70		
150<U<=200	±0.70	over 150~200	±0.85		
200<U<=250	±0.85	over 200~250	±1.00		
250<U<=320	±1.00	over 250~320	±1.20		

5	LEVER	POM	WHITE
4	SOLDER PIN	COPPER ALLOY	Tin Plated
3	CLAMP	Stainless Steel	
2	END COVER	PA66	UL94-V0 GREY
1	HOUSING	PA66	UL94-V0 GREY
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	Z&D	DATE	11.02.25	UNITS	MM	SHEET/OF	1 / 1
CHK.		DATE		SCALE	3:1 (:)		
APP.		DATE		NAME	BCWKV508A-XXP		
				DWG NO.	SP-03-WKV508AP		

REV.	CONTENT	CHK.	DATE
1			