

# CRIMP TERMINAL



## 2023 SERIES. 2.00 mm. (0.079") Pitch housing

### General Features

- Accommodates wire range AWG 26 through 30
- Use in housing 2.00 mm pitch 2018 and 2022 series
- Tin plated dual beam contact with locking lance
- Maximum insulation diameter 1.30 mm (0.051")

### Materials

- Contact: Phosphor bronze
- Operating temperature -40°C to +85°C



### Dimensional Information

### Electrical Features

- Current rating: < 2.5 A
- Contact resistance: < 20 mΩ

### Mechanical features

- Durability: 25 cycles
- Wire pull-out force:
  - 2.00 Kg 26 AWG
  - 1.00 Kg 28 AWG
  - 0.80 Kg 30 AWG

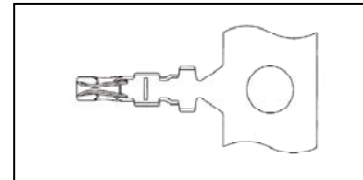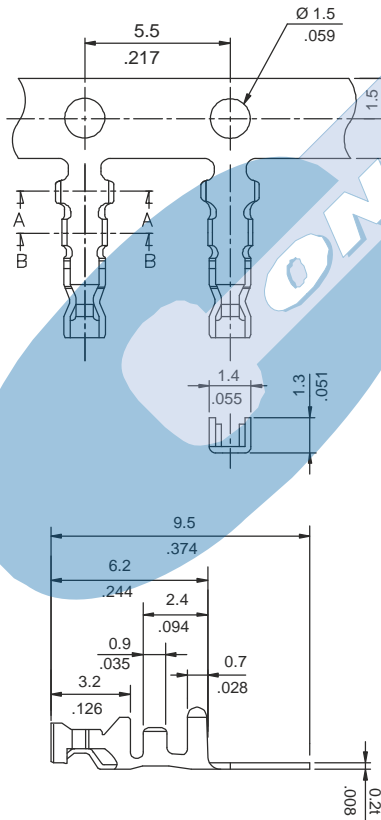

**2023 - 2- 00- E**  
1 2

### 1. Terminal Serie

### 2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose Piece