


REVISIONS				
REV	DESCRIPTION	DATE	DRAWN	APPROVED
AO				

Dimensions

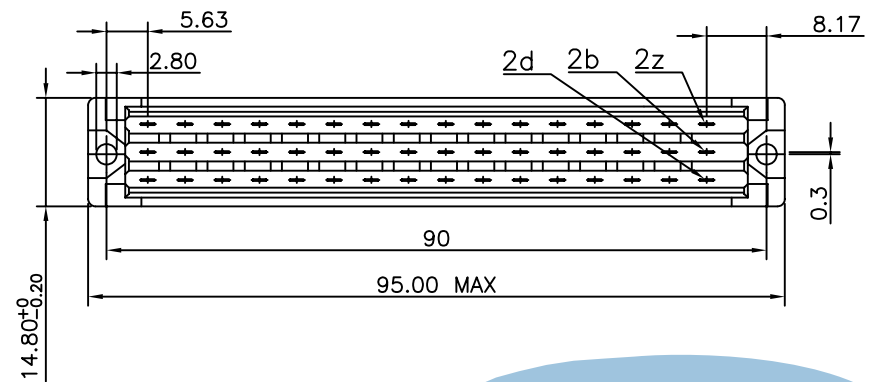



DIN 41612 EUROCARD CONNECTORS

Vertical Female Type F48 Connectors

Technical data
 EURO DIN 41612
 Housing
 Contact
 Plating:


Power
 PBT & 30%Class Fiber(UL94V-0)
 Female : Phosphor Bronze
 2U" Au plated on contact area,
 Tin-plated on tail
 -55°C~ +105°C
 20m(ohm)max.
 10⁶M(ohm)min.
 5.6 AMP
 AC 1000V for 1 minute
 75N max.
 0.15 N min.per individual contact
 Class 3

Operating temperature
 Contact resistance
 Insulator resistance
 Current rating
 Withstanding voltage
 Insertion force
 Withdrawal force
 Contact Rating:
 RoHS Compliant

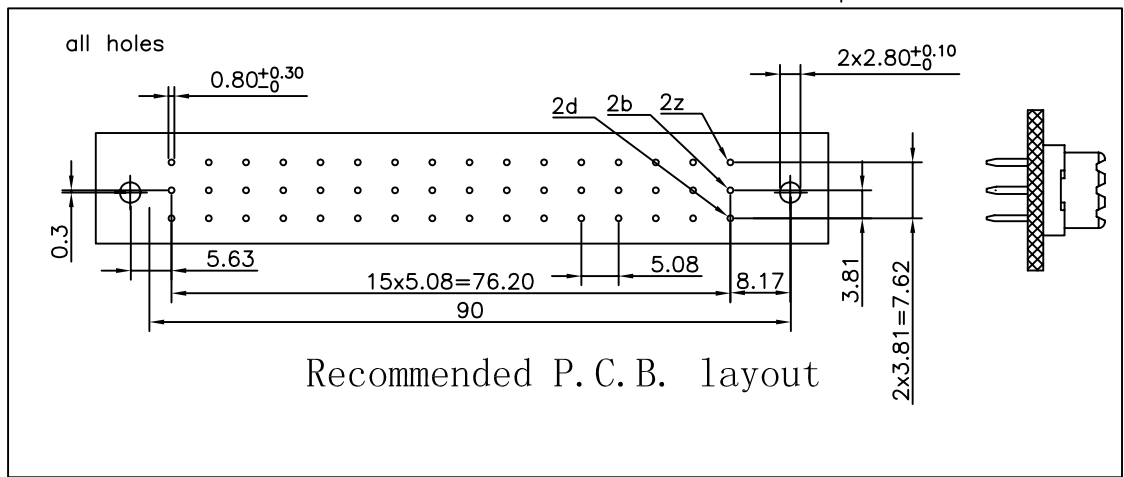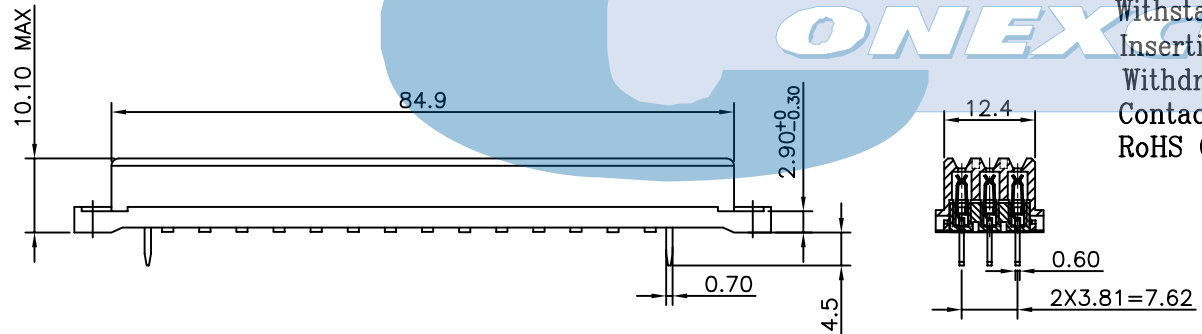

Recommended P.C.B. layout

* For the configuration Part Number consult Sales Office

MATERIAL:	DRAWN:	Z.F.W	2013.02.01	2310 Series				
FINISH:	DESIGN:							
ALL DIMENSIONS ARE IN mm	CHECKED:							
THIRD ANGLE PROJECTION	APPROVED:							
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:				PART NUMBER:				
GENERAL TOLERANCE				SERIES: 126				
ANGLE TOLERANCE				DRAWING NUMBER				
X.	±0.30	X'	±3.0°	REV	SCALE	SIZE	SHEET	
.X	±0.25	.X'	±2.0°	AO		A4	1 OF 1	
.XX	±0.15	.XX'	±1.0°					
.XXX	±0.05	.XXX'						