

SINGLE ROW CRIMP CONNECTOR HOUSING



2520 SERIES. 2.50 mm. (0.098") Pitch.



General Features

- Available in 2 through 20 circuits
- Mates with 2.50 mm pitch 2521 and 2522 headers and 0.64 mm square pin headers
- Polarised with friction lock
- Use crimp terminal 2523

Materials

- Insulator: Nylon 6/6 UL 94 V-0
- Operating temperature. -40°C to + 85°C
- RoHS compliant

Dimensional Information

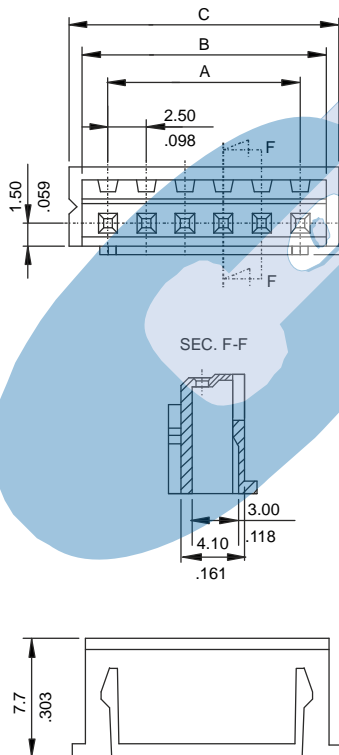

2520 - 2- XX- 1
1 2 3

1. Connector Serie

3. (XX) Number of circuits

- Available in 2 through 20 circuits

Dimensions: (in mm.)

A = 2.50 x (XX*-1)

B = 2.50 x (XX*)+0.70

C = 2.50 x (XX*)+2.30

*XX (Number of circuits)