

# SINGLE ROW DUAL BODY VERT. PIN HEADER



## 2548 SERIES. 2.54 mm (0.100") pitch.




### General Features

- Available in 2 through 40 circuits
- Mates with sockets 2.54 mm pitch 2101, 2550, 2595, 2596, 2553, 2554, 2247, 2551, 2552, 2577, 2102, 2106 & 2452 series
- 0,64 mm. square pin with different plating
- Different pin length
- Consult Sales Office

### Materials

- Insulator: High temperature thermoplastic UL 94 V-0
- Contact: brass
- Operating temperature: -40°C to +105°C
- RoHS compliant

### Dimension Information

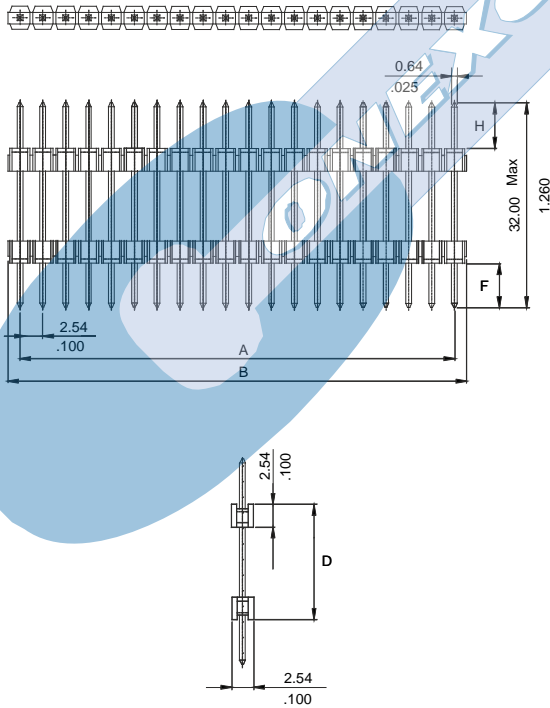


### Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 600 V AC/minute
- Insulation resistance: >1000 MΩ
- Capacitance: < 2 pF at 1 KHz

### Mechanical Features

- Pin retention force to insulator: > 0,50 Kgf
- Durability: 50 cycles



### Ordering Information:

**2548 - T- XX- C**  
 1            2            3            4

#### 1. Connector Series

#### 2. (T) Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over nickel  
Recommended Finish

- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel

#### 3. (XX) Number of circuits

- Available in 2 through 40 circuits

#### 5. (C) Pin Dimensions

- The dimensions H, D and F are optional  
 (Check te dimmensions table and consult Sales Office)

Dimensions: (In mm.)

A = 2.54 x (XX\*-1)

B = 2.54 x (XX\*)


\* XX (Number of circuits)

# SINGLE ROW DUAL BODY VERT. PIN HEADER



**2548 SERIES.** 2.54 mm (0.100") pitch.

Dimensions

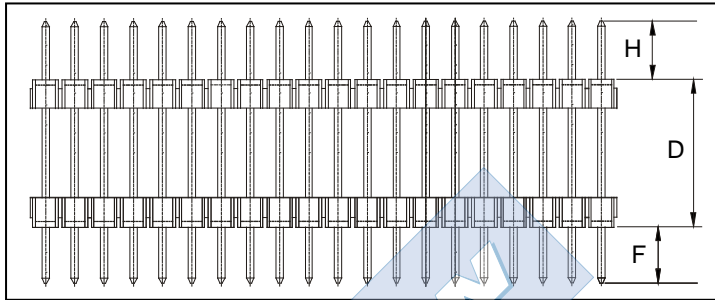

C = Dimensión de los pines

● C = 1. H = 8.90mm.	D = 11.08mm.	F = 3.05mm
● C = 2. H = 6.00mm.	D = 7.00mm.	F = 3.00mm
● C = 3. H = 6.00mm.	D = 5.08mm.	F = 3.00mm
● C = 4. H = 8.13mm.	D = 14.42mm.	F = 2.90mm
● C = 5. H = 7.00mm.	D = 28.00mm.	F = 3.00mm
● C = 6. H = 5.90mm.	D = 11.20mm.	F = 3.40mm
● C = 7. H = 7.00mm.	D = 24.00mm.	F = 3.00mm
● C = 9. H = 8.00mm.	D = 14.50mm.	F = 3.00mm
● C = 15. H = 7.00mm.	D = 14.00mm.	F = 3.00mm
● C = 16. H = 2.50mm.	D = 6.00mm.	F = 2.50mm
● C = 17. H = 3.00mm.	D = 13.10mm.	F = 3.00mm
● C = 18. H = 3.20mm.	D = 18.50mm.	F = 3.20mm
● C = 19. H = 6.00mm.	D = 13.00mm.	F = 3.00mm
● C = 20. H = 3.00 mm.	D = 30.00 mm.	F = 3.00 mm.
● C = 22. H = 9.10 mm.	D = 5.50 mm.	F = 9.00 mm.
● C = 23. H = 3.00 mm.	D = 6.00 mm.	F = 6.00 mm.
● C = 24. H = 4.40 mm.	D = 5.10 mm.	F = 3.30 mm.
● C = 25. H = 3.20 mm.	D = 8.00 mm.	F = 3.20 mm.
● C = 26. H = 3.00 mm.	D = 31.50 mm.	F = 3.00 mm.
● C = 27. H = 6.00 mm.	D = 14.10 mm.	F = 3.00 mm.
● C = 28. H = 6.00 mm.	D = 10.00 mm.	F = 3.00 mm.
● C = 29. H = 3.00 mm.	D = 10.40 mm.	F = 3.00 mm.
● C = 30. H = 4.50 mm.	D = 25.00 mm.	F = 4.50 mm.
● C = 31. H = 3.60 mm.	D = 24.90 mm.	F = 2.80 mm.