

SINGLE ROW VERTICAL SMT PIN HEADER



2590 SERIES. 2.54 mm (0.100") pitch.



General Features

- Available in 2 through 40 circuits
- Mates with sockets 2.54 mm pitch 2101, 2550, 2595, 2596, 2553, 2554, 2247, 2551, 2552, 2577, 2102, 2106 & 2452 series
- 0,64 mm. square pin with different plating
- Different pin length. Consult Sales Office

Materials

- Insulator: High temperature thermoplastic UL 94 V-0
- Contact: brass
- Operating temperature: -40°C to +105°C
- RoHS compliant

Dimension Information

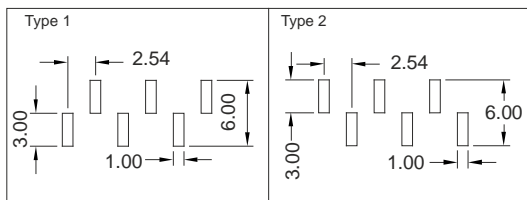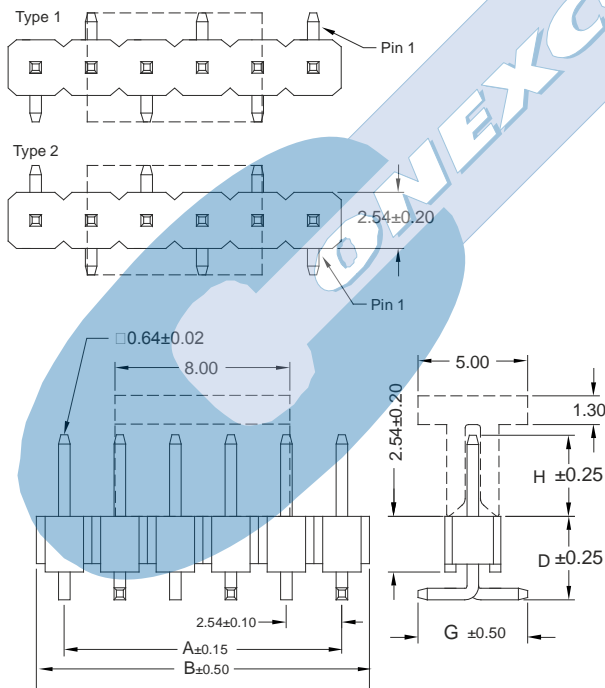

RECOMMENDED PCB LAYOUT

Dimensions: (In mm.)

A = 2.54 x (XX*1)

B = 2.54 x (XX*)


* XX (Number of circuits)

Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 600 V AC/minute
- Insulation resistance: >1000 MΩ
- Capacitance: < 2 pF at 1 KHz

Mechanical Features

- Pin retention force to insulator: > 0,50 Kgf
- Durability: 50 cycles



Ordering Information:

2590 - T- XX- S- C E
 1 2 3 4 5 6

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated
 - T = 3. Gold flash over nickel
- Recommended Finish
- T = 5. 15μ" gold over nickel
 - T = 6. 30μ" gold over nickel

3. (XX) Number of circuits

- Available in 2 through 40 circuits

4. (S) Contacts Configuration

- S = 1. Type 1
- S = 2. Type 2

5. (C) Pin Dimensions

- C = 0. H = 5.00 mm. D = 3.50 mm. G = 4.83 mm.
- C = 1. H = 5.84 mm. D = 3.50 mm. G = 4.83 mm.
- C = 2. H = 8.08 mm. D = 3.50 mm. G = 4.83 mm.
- C = 3. H = 6.20 mm. D = 3.20 mm. G = 4.86 mm.
- C = 4. H = 6.00 mm. D = 3.81 mm. G = 5.00 mm.
- C = 6. H = 11.50 mm. D = 3.50 mm. G = 5.30 mm.
- C = 7. H = 13.00mm. D = 3.50 mm. G = 4.83 mm.

6. (E) Packing Options

- E = 1. Tube + Pad
- E = 2. Reel + Pad