

# SINGLE ROW CRIMP CONNECTOR SYSTEM




## 2866 SERIES. 2.54mm(0.100"). Single Row Connector

### Features

- Available in 2 through 12 circuits
- Insulation Material: Glass filled polyester UL 94V-0
- Available with polarising and locking latch
- Accepts 2869 and 2870 series crimp terminal
- Mates with 2.54mm pitch single row headers and 2867 and 2868 series headers

### Dimensional Information

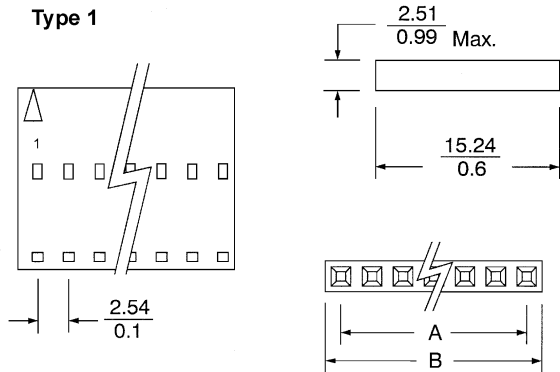


### Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
02	2866-202C	2,54(0,100)	5,05(0,199)
03	2866-203C	5,08(0,200)	7,59(0,299)
04	2866-204C	7,62(0,300)	10,13(0,399)
05	2866-205C	10,16(0,400)	12,67(0,499)
06	2866-206C	12,70(0,500)	15,21(0,599)
07	2866-207C	15,24(0,600)	17,75(0,699)
08	2866-208C	17,78(0,700)	20,29(0,799)
09	2866-209C	20,32(0,800)	22,83(0,899)
10	2866-210C	22,86(0,900)	25,37(0,999)
11	2866-211C	25,40(1,000)	27,91(1,099)
12	2866-212C	27,94(1,100)	30,45(1,199)


C = Type connector

C = 1. Type 1    C = 2. Type 2    C = 3. Type 3



### Type 2

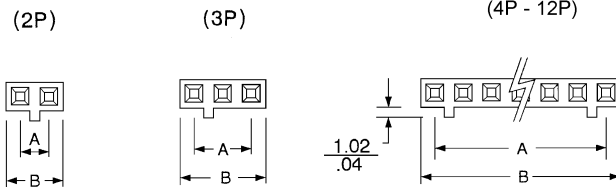


Front view  
for type 2 and 3

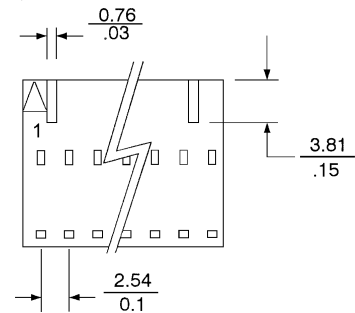


### Type 3



Type 1  
C = 1



Type 2  
C = 2



Type 3  
C = 3