

STRAIGHT SHROUDED HEADER WITH LATCH




4456 SERIES. 2.54 x 2.54mm(0.100 x 0.100"). For PCB Solder

Features

- Available in 10, 14, 16, 20, 26 and 30 Circuits
- Insulator Material: Glass filled Polyester 6T UL 94V-0
- Contact Material: 0.64mm square pin in phosphor bronze
- Different plating options are available
- Mates with 5435 series female connector
- Fully shrouded. Low profile
- Low profile
- For other options consult the Sales Office

Dimensional Information

Ordering and Dimensional Information

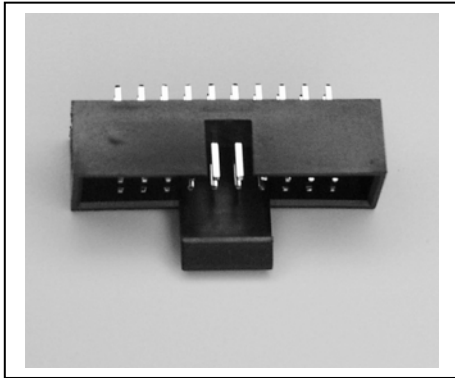

Circuit Size	Part Number	Dimensions		
		A	B	
10	4456-T100	20.50(0.807)	18.10(0.712)	10.16(0.400)
14	4456-T140	25.58(1.007)	23.18(0.912)	15.24(0.600)
16	4456-T160	28.12(1.107)	25.72(1.012)	17.78(0.700)
20	4456-T200	33.20(1.307)	30.80(1.212)	22.86(0.900)
26	4456-T260	40.82(1.607)	38.42(1.512)	30.48(1.200)
30	4456-T300	46.00(1.811)	43.80(1.724)	35.56(1.400)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel.
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

