

FLAT CABLE IDC DIP PLUG



5433 SERIES. 2.54 x 2.54 mm. (0.100 x 0.100") pitch.

General Features

- Available in 4 through 26 circuits
- Allows to solder the flat cable to the PCB
- Use flat cable 1.27 mm. pitch 9127 series



Electrical Features

- Voltage rating: < 250V
- Current rating: < 1.50 A
- Dielectric withstanding Voltage: 500 V AC/minute
- Contact resistance: < 10 mΩ
- Insulation resistance: >1000 MΩ

Materials

- Insulator: glass filled polyester UL 94V-0
- Terminal: Phosphor bronze
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimension Information

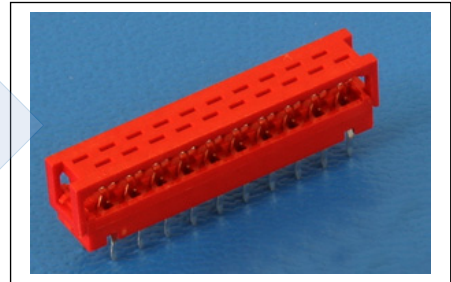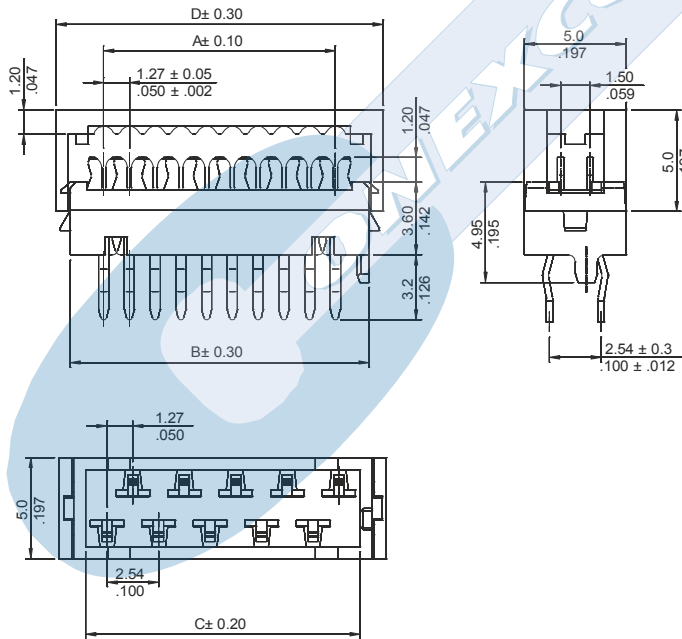

Ordering Information:

5433 - T- XX- 1
 1 2 3 4


1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated

3. (XX) Number of circuits

- Available in 4 through 26 circuits

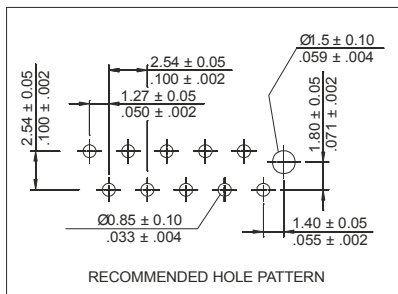

Dimensions:

- A** = 1.27 x (XX-1)
- B** = 1.27 x (XX)+2.03
- C** = 1.27 x (XX)+0.83
- D** = 1.27 x (XX)+3.43

(XX) = Number of circuits