


General Features

- ## Electrical Features

OBSOLETO

5514

- Card Insertion / Eject Force: < 0.98 Kgf
- Card release force: 0.40 Kgf
- Durability: 10.000 cycles

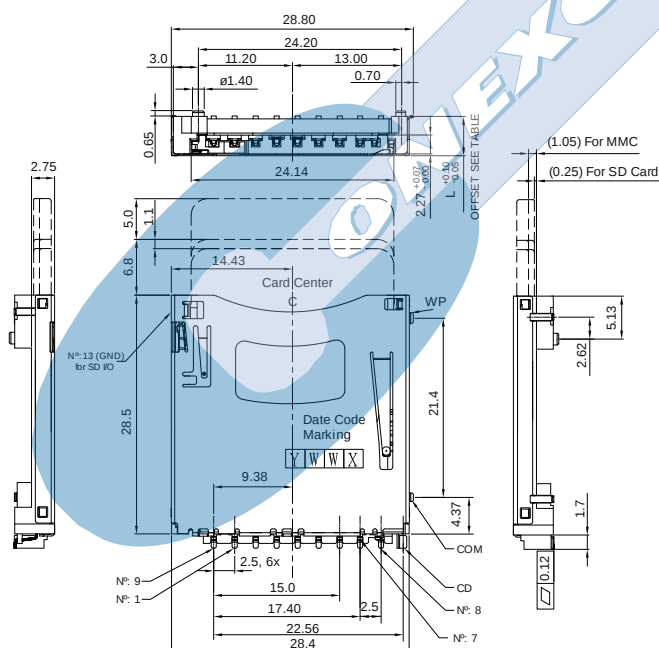

5512 - T- XX- S

1 2 3 4

2. Plating Options





- T = **13**. Sel. gold flash over nickel overall
Recommended Finish
- T = **15**. 15u" sel. gold over nickel overall

3. Number of circuits


- Available in 09 circuits

5. Stand-off options

- S = **1.** 0.0 mm. Dim L = 2.75 mm.
- S = **2.** 1.5 mm. Dim L = 4.25 mm.
- S = **3.** 1.8 mm. Dim L = 4.55 mm.
- S = **4.** 2.0 mm. Dim L = 4.75 mm.

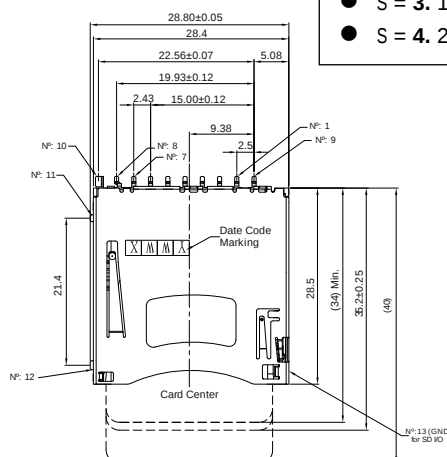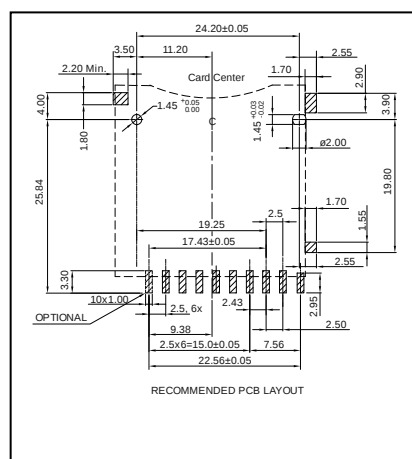

- Write Protect SW.: Lock
- Status : Read only



- Write Protect SW.: Unlock
- Status : Write enable