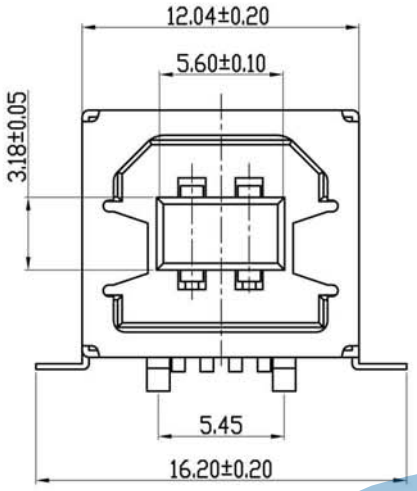

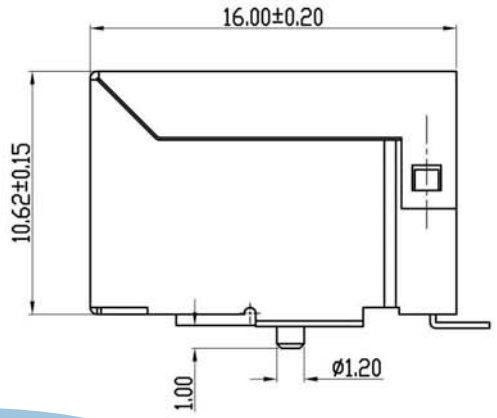

5609 Series:

Specification

1.Voltage Current Rating:1AMP.30V AC
2.Insulation Resistance:1000MΩ Min
3.Contact Resistance:30mΩ Max
4.Dielectric Withstanding Voltage:500V AC
5.Temperature Range:−20°C to +60°C

NOTE:

Tolerances unless otherwise specified:
0−10:±0.15; 10−20:±0.20; 20−30:±0.25

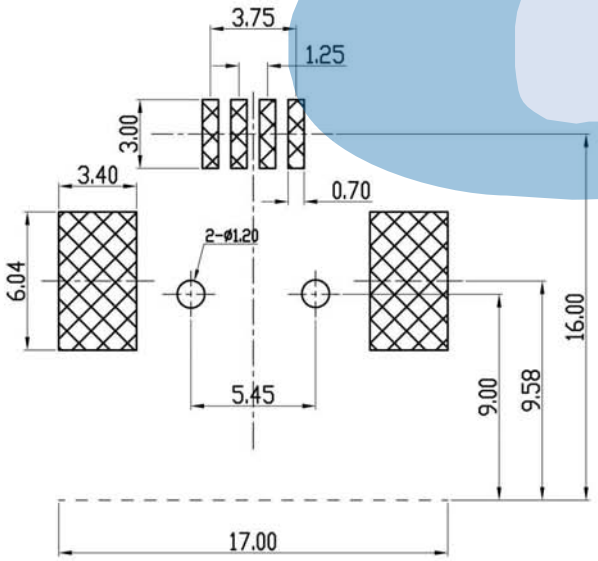

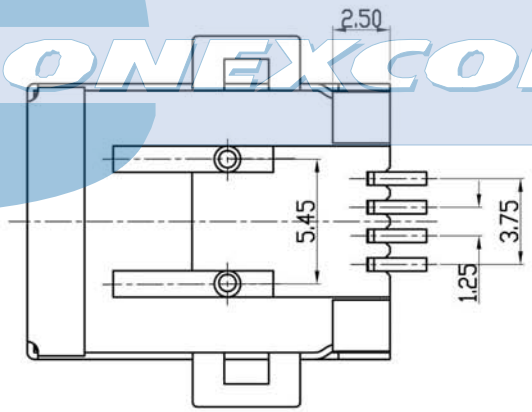

ONEXCON

NO.	VARIETY	MATERIAL	QT, Y	REMARK
3	Shell	C2680	1	T=0.25 Piateg nickel
2	Housing	PA6T	1	UL94V-0 Nature/Black/White
1	Contact	C2680	4	T=0.30 Piateg Gold

TOLERANCE: X.X ±0.25, X.XX ±0.20, X.XXX ±0.05, X.° ±5°, X.X° ±2°	DRAWED BY :	DATE : 2008. 6. 05	PART NAME: USB B-TYPE FEMALE SMT
UNIT: mm [inch]	CHECKED BY:	DATE : 2008. 6. 05	DRAW NO. / PART NO. 5609-3041
SCALE:1:1 SIZE: A4	APPROVED BY:	DATE : 2008. 6. 05	REMARK / MOLD NO.