

3.00mm MICRO POWER STRAIGHT HEADER




5751 SERIES. 3.00mm(0.118"). For High Current / High Density

Features

- Available in 2 a 12 circuits in single row
- Material: Nylon 9T UL 94V-0
- Tin plated brass pin
- Mates with 5750 series housing
- Positive lock
- Current Rating: 5 A max.

Dimensional Information


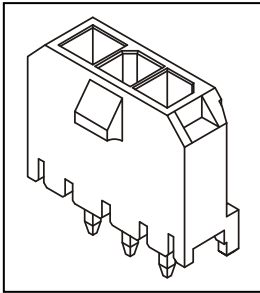


Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
2	5751 – 2021	3.00 (.118)	9.00 (.354)
3	5751 – 2031	6.00 (.236)	12.00 (.472)
4	5751 – 2041	9.00 (.354)	15.00 (.591)
5	5751 – 2051	12.00 (.472)	18.00 (.709)
6	5751 – 2061	15.00 (.591)	21.00 (.827)
7	5751 – 2071	18.00 (.709)	24.00 (.945)
8	5751 – 2081	21.00 (.827)	27.00 (1.063)
9	5751 – 2091	24.00 (.945)	30.00 (1.181)
10	5751 – 2101	27.00 (1.063)	33.00 (1.299)
11	5751 – 2111	30.00 (1.181)	36.00 (1.417)
12	5751 – 2121	33.00 (1.299)	39.00 (1.535)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel.
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

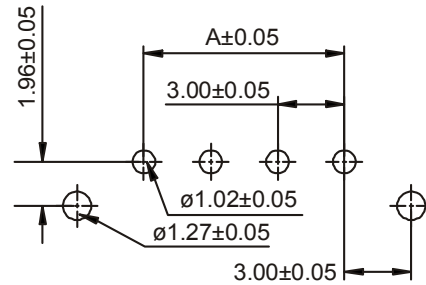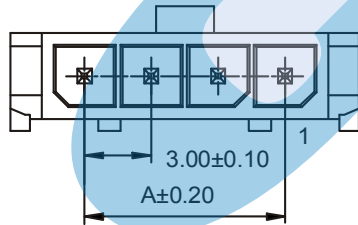

MECANIZADO RECOMENDADO

