


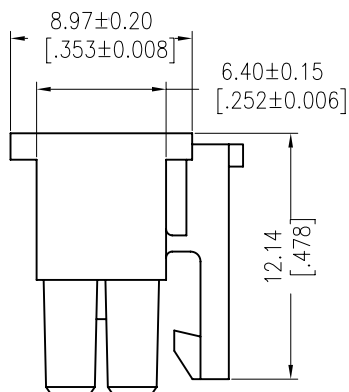
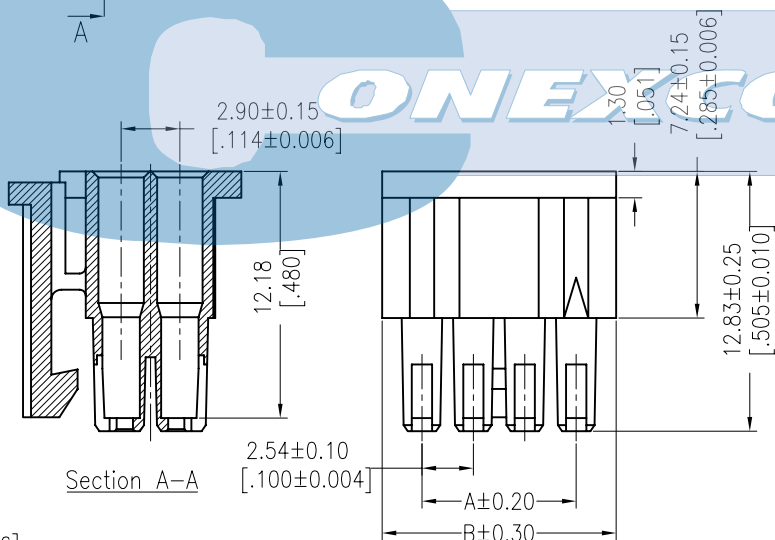


NOTES:
Rated Current:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-25℃ to +85℃

Insulator Material:PA66 UL94V-2



Dimensional & Ordering Information

Circuit Size	Part Number	Dimensions	
		A	B
4	5780-1041	2,54	6,48
6	5780-1061	5,08	9,02
8	5780-1081	7,62	11,56
10	5780-1101	10,16	14,1
12	5780-1121	12,7	16,64
14	5780-1141	15,24	19,18
16	5780-1161	17,78	21,72
18	5780-1181	20,32	24,26
20	5780-1201	22,86	26,8
22	5780-1221	25,4	29,34
24	5780-1241	27,94	31,88
26	5780-1261	30,48	34,42
28	5780-1281	33,02	36,96
30	5780-1301	35,56	39,5
32	5780-1321	38,1	42,04
34	5780-1341	40,64	44,58
36	5780-1361	43,18	47,12
38	5780-1381	45,72	49,66
40	5780-1401	48,26	52,2
42	5780-1421	50,8	54,74
44	5780-1441	53,34	57,28
46	5780-1461	55,88	59,82
48	5780-1481	58,42	62,36
50	5780-1501	60,96	64,9

					OPERATION	DRAW	William Chen	2010.01.03	SCALE	1:1		
					X.X ±0.40	DESIGN			UNIT	mm		
					X.XX ±0.25				SIZE	A4		
A0	2010/01/03	NEW			X.XXX ±0.15	CHECK			SHEET	1/1	PART NO.	5780 SERIES
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3°	APPROVE			PROJ.	Customer NO.	TITLE: 2.54mm HOUSING	
					DIM TOL							