



NOTES:  
 Rated Current:3.0AMP  
 Rated Voltage:675V AC/DC  
 Contact Resistance:20mΩ max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-55°C to +125°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:LCP+30%G.F UL94V-0

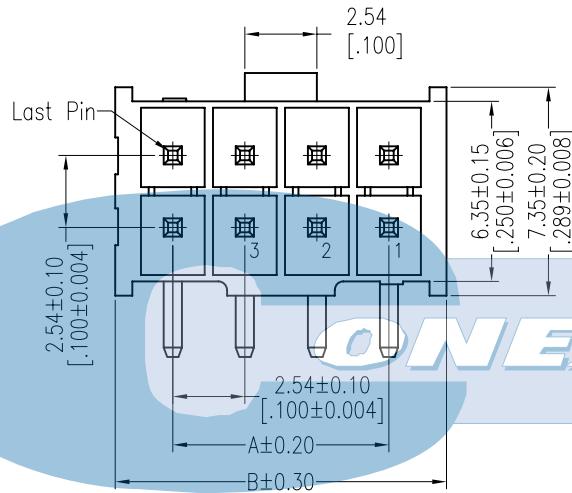


Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

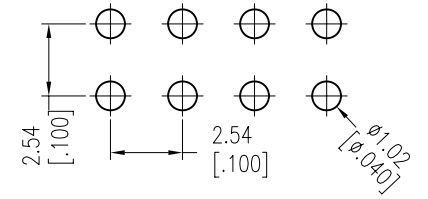

Dimensional & Ordering Information

Circuit Size	Part Number	Dimensions	
		A	B
4	5782-2041	2,54	6,6
6	5782-2061	5,08	9,14
8	5782-2081	7,62	11,68
10	5782-2101	10,16	14,22
12	5782-2121	12,7	16,76
14	5782-2141	15,24	19,3
16	5782-2161	17,78	21,84
18	5782-2181	20,32	24,38
20	5782-2201	22,86	26,92
22	5782-2221	25,4	29,46
24	5782-2241	27,94	32,0
26	5782-2261	30,48	34,54
28	5782-2281	33,02	37,08
30	5782-2301	35,56	39,62
32	5782-2321	38,1	42,16
34	5782-2341	40,64	44,7
36	5782-2361	43,18	47,24
38	5782-2381	45,72	49,78
40	5782-2401	48,26	52,32
42	5782-2421	50,8	54,86
44	5782-2441	53,34	57,4
46	5782-2461	55,88	59,94
48	5782-2481	58,42	62,48
50	5782-2501	60,96	65,02

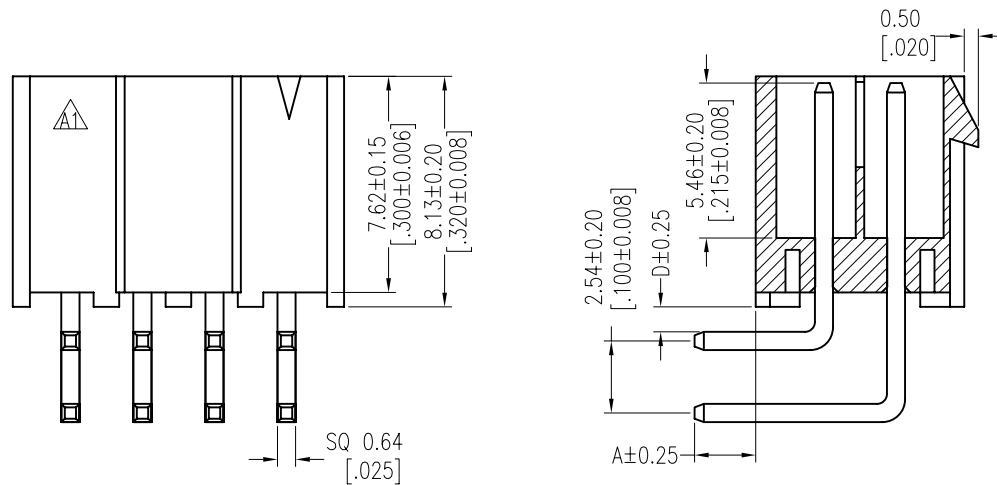

ITEM	A	D
Standard	2.16	0.88
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	TITLE
A1	2010/01/25	Modify Drawing			X.X ±0.40	DESIGN	1:1	PART NO. <b>5782 SERIES</b>
A0	2009/02/12	NEW			X.XX ±0.25	CHECK	mm	
					X.XXX ±0.15	APPROVE	A4	TITLE:
					Angle ± 3'		1/1	2.54mm WAFER 90° DIP
					DIM TOL		SHEET	Customer NO.

