



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)



NOTES:
 Rated Current: 3.0AMP
 Rated Voltage: 675V AC/DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -55°C to +125°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: LCP+30%G.F UL94V-0

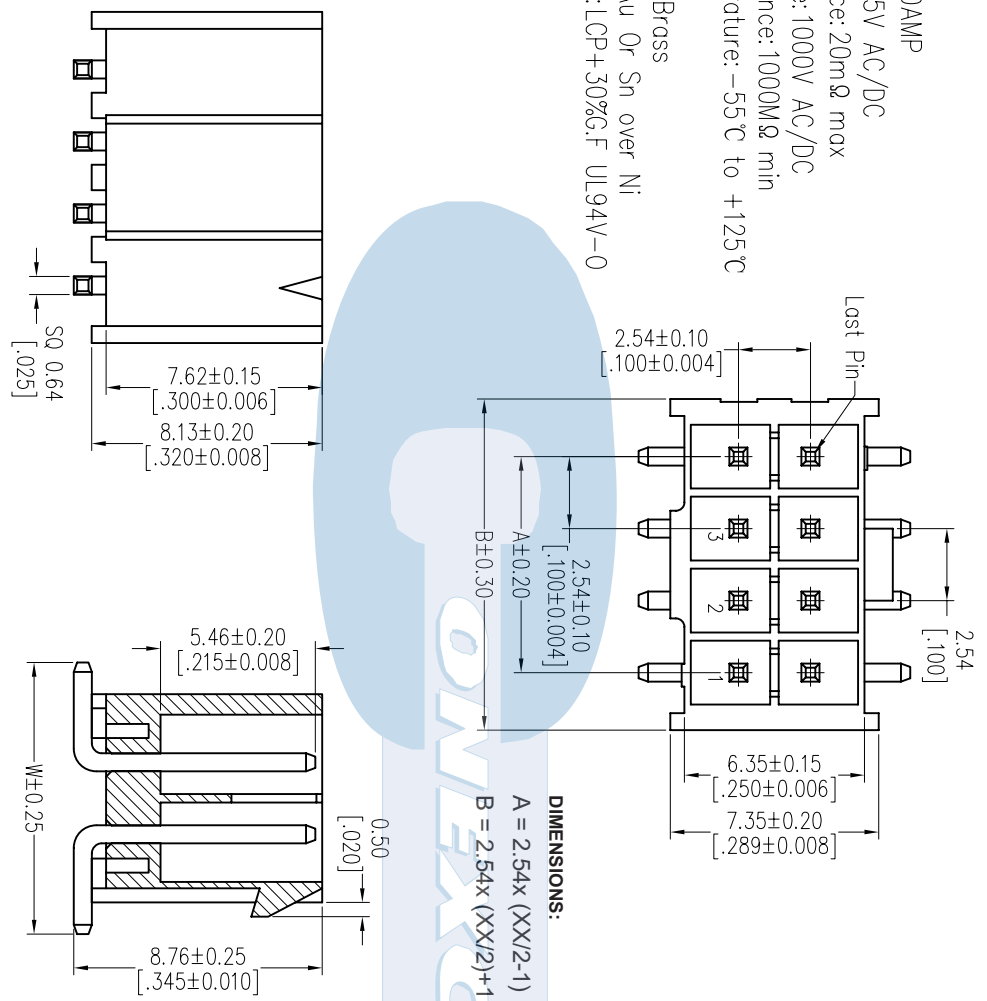

DIMENSIONS:
 A = 2.54x (XX/2-1)
 B = 2.54x (XX/2)+1.52

ITEM	W
Standard	9.58
Alternate	

Ordering Information:

5783- I- XX- 1

1 2 3

- Connector Series
- (I) Contact Plating
 - T = 2. Tin plated
 - T = 3. Gold flash over nickel
 - T = 5. 15μ" gold over nickel
 - T = 6. 30μ" gold over nickel
- (XX) Number of circuits
 - Available in 4 through 50 circuits

REV	DATE	MODIFICATION DESCRIPTION	CHANGE DIM	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/09/08	NEW		XX ±0.40	JYHuang	2012/09/08	mm	A4	SBE TABLE
				XX ±0.25	CHECK	DATE	SIZE	1/1	TITLE: 2.54mm WAFER 180° SMT
				Angle ± 3°	APPROVE	DATE	SHEET		Customer NO.
							PROJ.		



ti HAUUĐU