# **CRIMP FEMALE TERMINAL**



# 6202 SERIES. 6.20 mm. (0.244") Pitch housing.

# **General Features**

- Accommodates wire range AWG 14 through 20
- Use in housing 6.20 mm pitch 6200 series
- Male contact tin plated with locking lance
- Maximum insulation diameter 4.10 mm (0.161")

#### Materials

- Contact: Phosphor bronce tin plated
- Operating temperature -40°C to +85°C

#### **Dimensional Information**


## **Electrical Features**

- Current rating: < 20 A</li>
- Contact resistance: < 7 mΩ

## **Mechanical Features**

- Durability: 25 cycles
- Wire pull-out force:

12.00 Kgf 14 AWG 11.00 Kgf 16 AWG 9.00 Kgf 18 AWG 7.00 Kgf 20 AWG

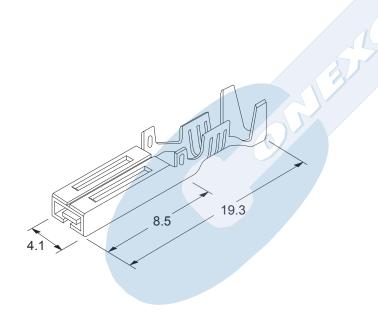

<u>6202</u> - <u>T</u> - <u>00</u> - <u>E</u>	
1 2	
1. Terminal Serie	
2. (T) Contact Plating	
• T = <b>2.</b> Tin plated	
2. (E) Packing Options	
<ul> <li>E = 0. Chain</li> <li>E = 1. Loose Piece</li> </ul>	