

# MODULAR COUPLER JACK FCC-68



## 6895 SERIES. For panel mounting.

### General Features

- Available in 6/6 and 8/8 circuits
- Standard telephone jack FCC-68
- IDT termination for solid wire 24 to 26 AWG
- Accept standard plugs FCC-68
- Selective gold plating with different finish
- Panel mounting

### Materials

- Insulator: Thermoplastic UL 94V-0
- Contact: 0.40 mm thickness phosphor bronze
- Operating temperature: -25°C to + 85°C
- RoHS compliant


### Dimensional Information

### Electrical Features


- Voltage rating: < 125V
- Current rating: < 1.50 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 300 V AC/minute
- Insulation resistance: >1000 MΩ

### Mechanical Features

- Durability: 750 cycles

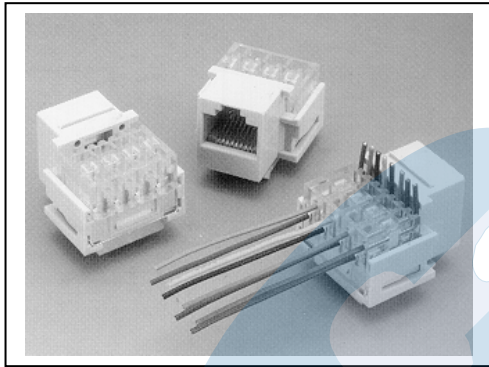

Circuits	Part Number
6/6	6895 - 5661
8/8	6895- 5881



RECOMMENDED PANEL CUT-OUT

