

MINI CIRCULAR DIN CONNECTORS



7001 SERIES. Receptacle for Wire Solder

Features


- Available in 3, 4, 5, 6, 7, 8 and 9 circuits
- High density
- With inner metal cover, strain relief cap and plastic hood
- Soldering termination contact crimp socket terminal
- Voltage rating 50V AC/DC
- Contact resistance: 20 MΩ max.
- Current rating: 1 Amp. AC / DC
- Dielectric withstanding: 500 V AC rms for 1 minute

Material / Finish

- Insulator Material: Glass filled polyester UL94V-0
- Moulding cover: A.B.S.
- Strain relief cap: P.V.C.
- Metal cover material: Brass
- Metal cover plating: Nickel
- Contact Material: Brass
- Contact Plating: Tin

Dimensional Information

Ordering and Dimensional Information

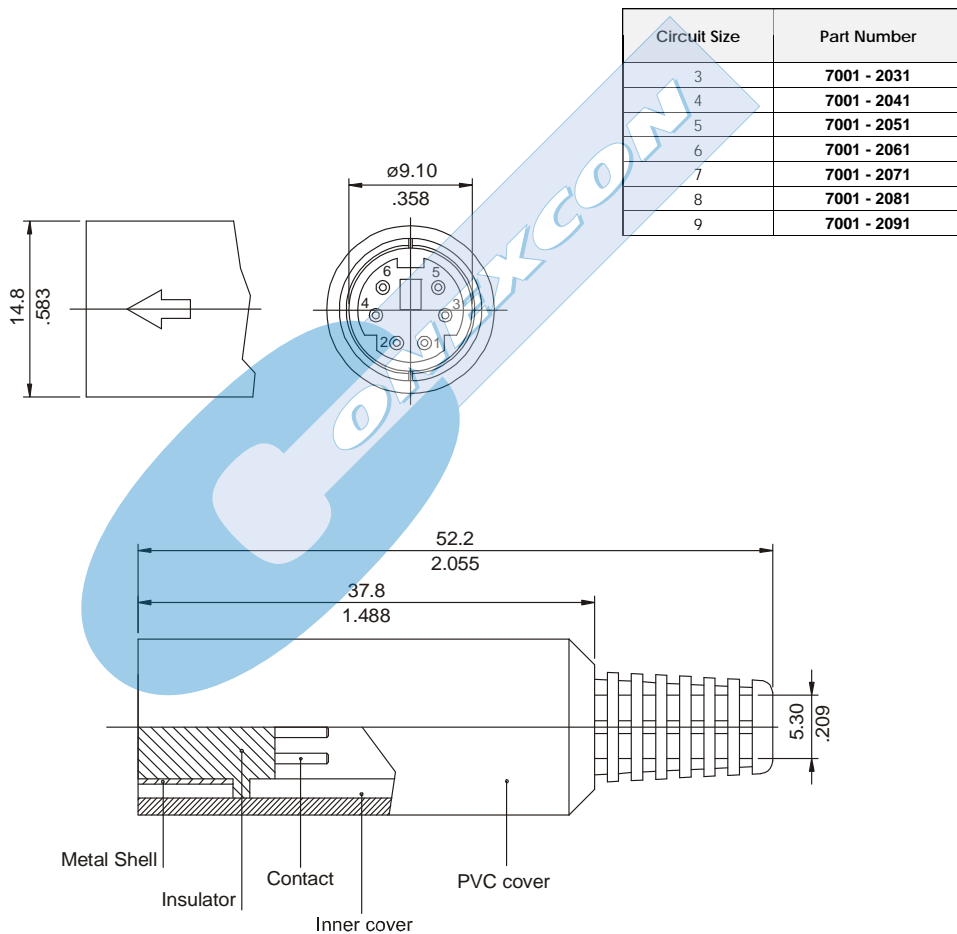

Circuits	3	4	5	6	7	8	9
Arrangement of contact							