

S/ENTRY PCB MOUNT MINI DIN CONNECTOR



7010 SERIES. Right Angle DIP Solder Receptacle

Features

- Available in 3, 4, 5, 6, 7, 8 and 9 circuits
- High density
- With inner metal cover
- With retaining clip ground strap
- Options: With or without metal shell
- Voltage rating 50V AC/DC
- Contact resistance: 20 MΩ max.
- Current rating: 1 Amp. AC / DC
- Dielectric withstanding: 500 V AC rms for 1 minute


Material / Finish

- Insulator: Glass filled polyester UL94V-0
- Earth terminal material: Phosphor bronze
- Earth terminal plating: Tin
- Contact Material: Phosphor bronze
- Contact plating: Silver

Dimensional Information

Ordering and Dimensional Information

Circuit Size	Part Number	
	Unshielded	Shielded
3	7010 - 2031	7010 - 2032
4	7010 - 2041	7010 - 2042
5	7010 - 2051	7010 - 2052
6	7010 - 2061	7010 - 2062
7	7010 - 2071	7010 - 2072
8	7010 - 2081	7010 - 2082
9	7010 - 2091	7010 - 2092

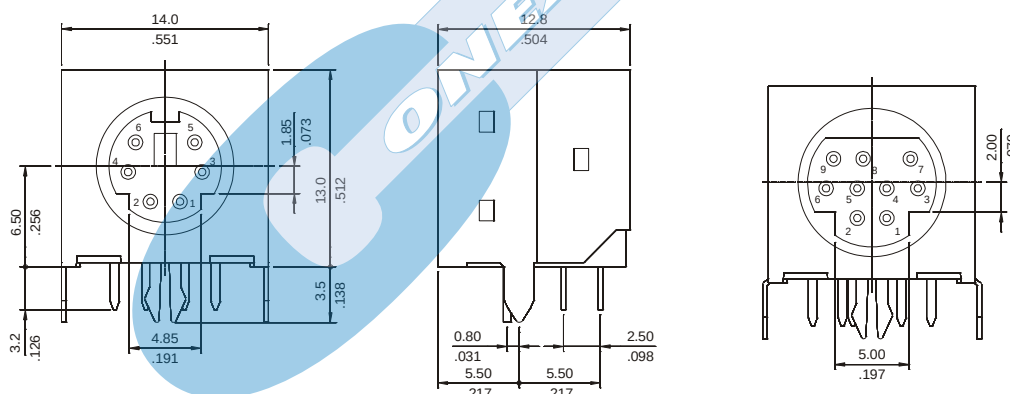

Circuits	3	4	5	6	7	8
Arrangement of Contact						
PCB Layout Tolerance						