

MINIATURE CIRCULAR CONNECTOR MINI DIN



7011 SERIES. Top Entry PCB Mount.

Features


- Available in 3, 4, 5, 6, 7 and 8 circuits
- High density
- With ground strap
- Voltage rating 50V AC/DC
- Contact resistance: 20 mΩ maximum
- Current rating: 1 Amp. AC / DC
- Dielectric withstanding: 500 V AC rms for 1 minute

Material / Finish

- Insulator: Glass filled polyester UL94V-0
- Earth terminal material: Phosphor bronze
- Earth terminal plating: Tin
- Contact Material: Phosphor bronze
- Contact plating: Silver

Dimensional Information

Ordering and Dimensional Information

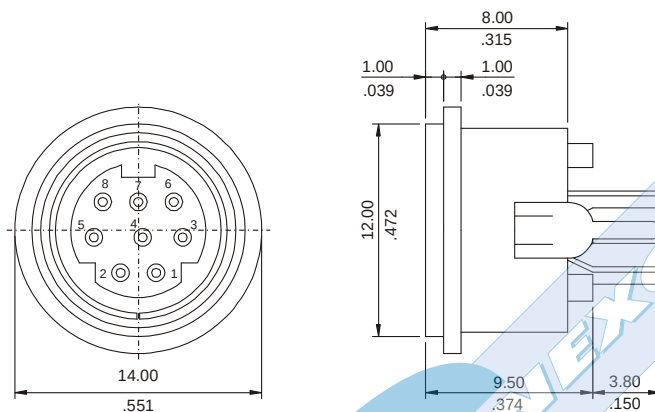

Circuit Size	Part Number
3	7011 - 2031
4	7011 - 2041
5	7011 - 2051
6	7011 - 2061
7	7011 - 2071
8	7011 - 2081

Circuits	3	4	5
Arrangement of Contact			
P.C Board Layout			
Tolerance .X $\pm 0.10/.004$.XX $\pm 0.05/.002$			

Circuits	6	7	8
Arrangement of Contact			
P.C Board Layout			
Tolerance .X $\pm 0.10/.004$.XX $\pm 0.05/.002$			