

SIDE ENTRY MULTIPORT PCB JACK FCC-68



7684 SERIES. Shielded right angle PCB jack. With leds and filters.


General Features

- Available in 8/8 circuits
- Available in 4 ports
- Standard telephone jack FCC-68
- 13.60 mm. height
- Accept standard plugs FCC-68 type
- Selective gold plating with different finish
- Bifurcated plastic foot print
- With /without grounding tabs

Materials

- Insulator: Thermoplastic UL 94V-0
- Contact: 0.35 mm thickness phosphor bronze
- Shielded: 0.25 mm thickness brass
- Operating temperature. -25°C to + 85°C
- RoHS compliant

Dimensional Information

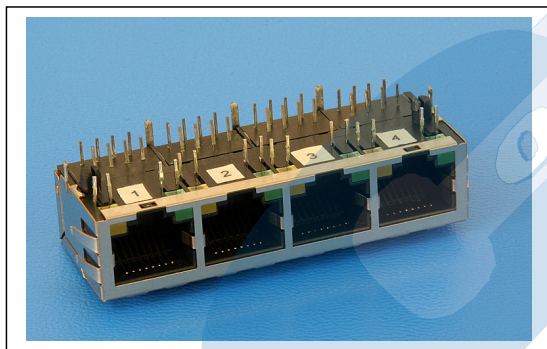

Electrical Features

- Voltage rating: < 125V
- Current rating: < 1.50 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 300 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Durability: 1000 cycles

Part Number		LED Colour	
Position Leds A	Position Leds B	LED 1	LED 2
7684 – T8811SF*	7684 – T8812SF*	Green	Yellow

T = Contact Plating




- T = 4. 10µ" gold over 50µ" nickel
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel
- T = 7. 50µ" gold over 50µ" nickel

S = Grounding Tabs

- S = 1. Shielded without grounding tabs
- S = 2. Shielded with grounding tabs

F = Filter Options

- *Replace F for the type of filter
(Check in the next page)

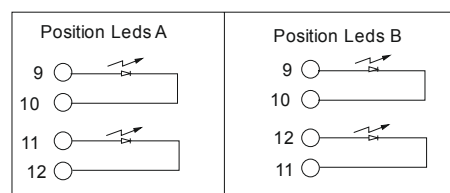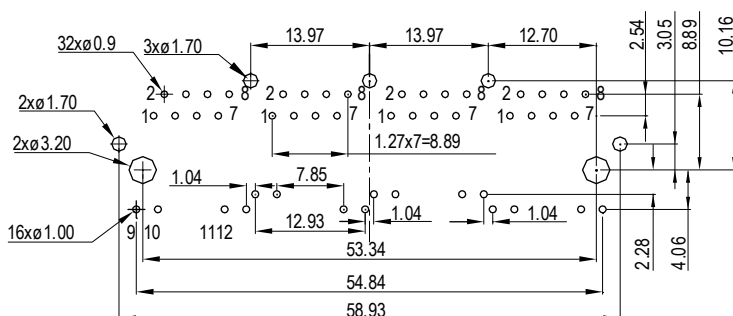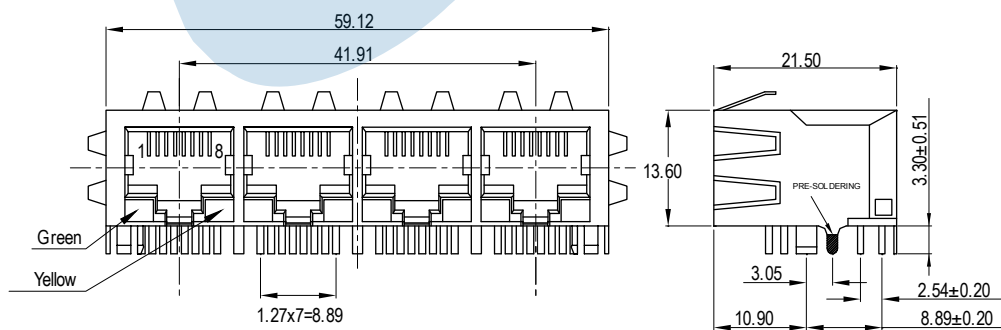


SIDE ENTRY MULTIPORT PCB JACK FCC-68



7684 SERIES. Shielded right angle PCB jack. With leds and filters.

Filter Type:

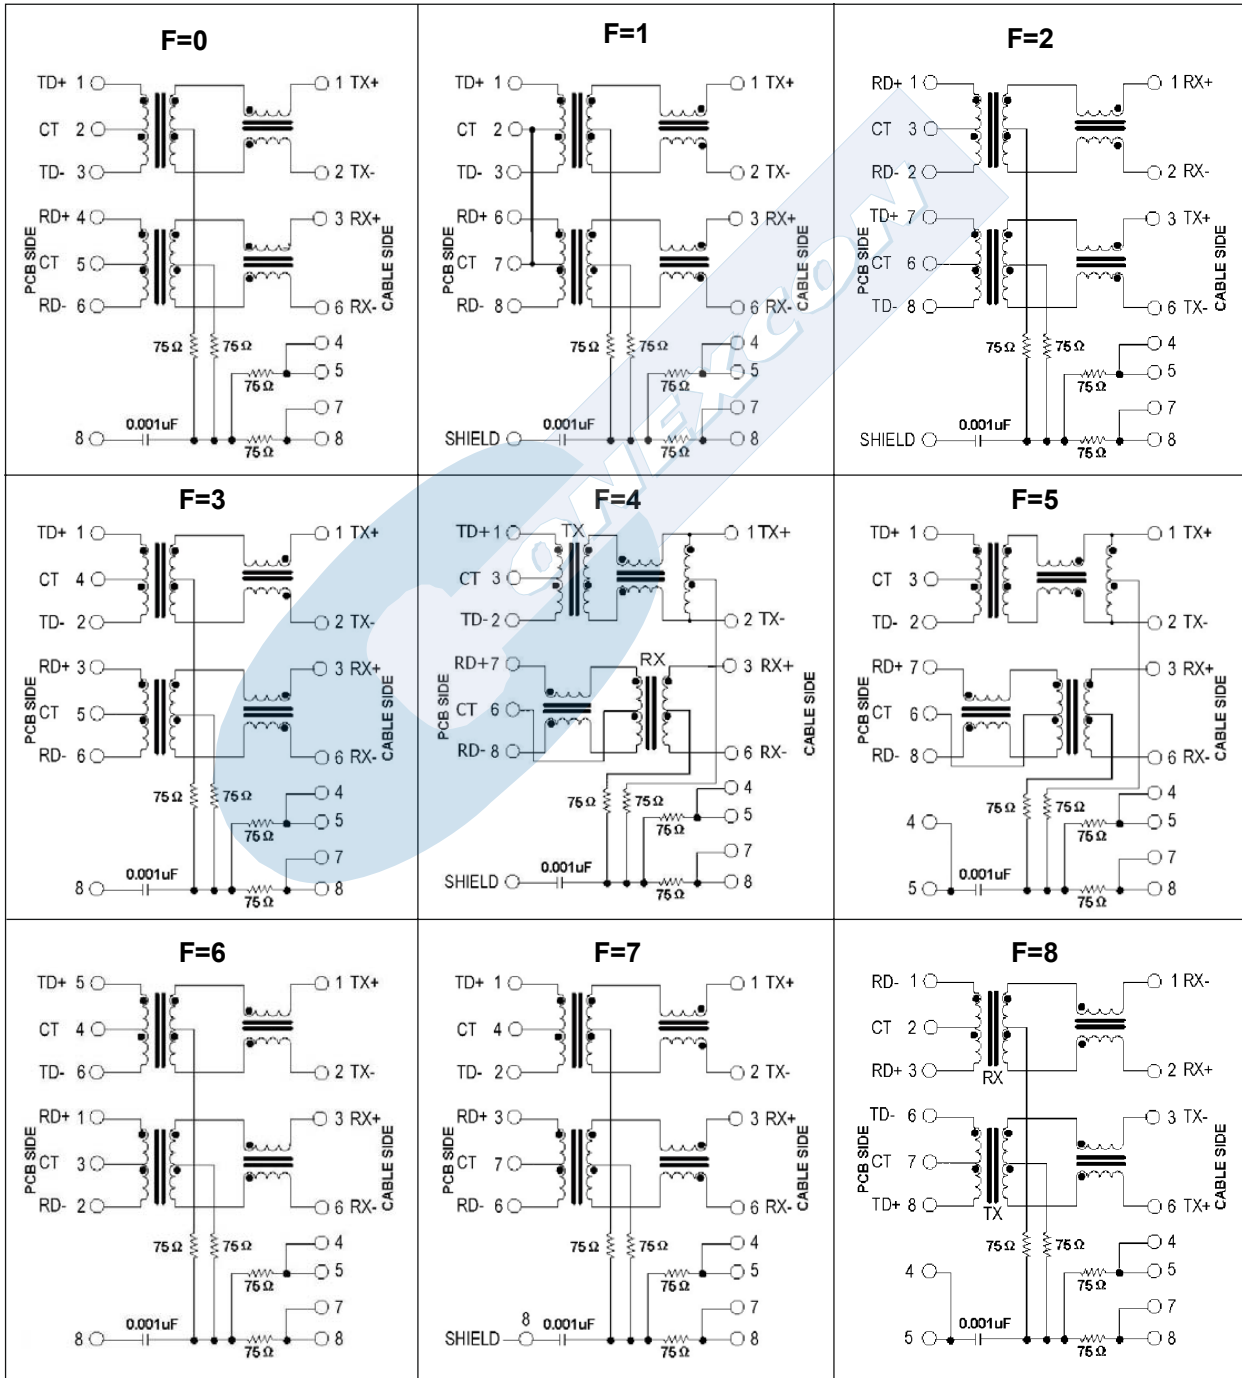

SIDE ENTRY MULTIPORT PCB JACK FCC-68



7684 SERIES. Shielded right angle PCB jack. With leds and filters.

Filter Type:

