

5.33mm RIGHT ANGLE D-SUB PLUG



8004 SERIES. For PCB Solder. Low Profile.





Features

- Available in 9 circuits
- Insulator Material: Glass filled polyester UL 94V-0
- Contact Material: Brass
- Different plating options are available
- Shell: Steel, tin plated as standard
- Standard connector C = 1 (Riveted ground hooks with #4-40 UNC open
- For other options consult the Sales Office

Dimensional Information

Ordering

8004 - T09C

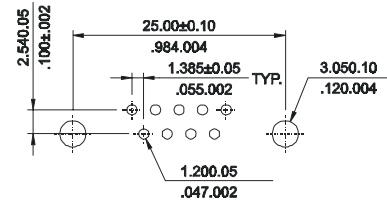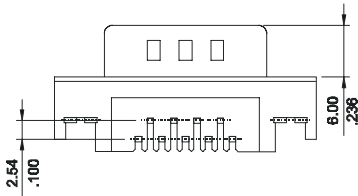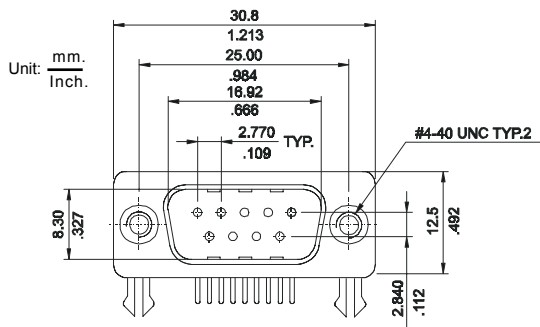

RECOMMENDED HOLE PATTERN

T = Contact Plating

- T = 3. Gold flash over 50μ" nickel
- T = 4. 10μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel

C = Hardware Options

- C = 1. Riveted ground hooks pre-loaded #4.40 UNC Hexagonal screws
- C = 0. Riveted ground hooks with #4.40 UNC open