

SLIM HIGH DENSITY D-SUB RECEPTACLE



8078 SERIES. For PCB Solder. Right Angle High Density D-Sub Receptacle


Features

- Available in 15 circuits
- Insulator Material: Glass filled Nylon 6T UL 94V-0
- Contact Material: Phosphor bronze
- Different plating options are available
- Shell Material: Steel, tin plated as standard
- Optional: #4-40 UNC hexagonal standoff or clinch nuts
- Other options: Hoods, mounting screw and accessories
- For other options consult the Sales Office

Dimensional Information

Ordering and Dimensional Information

8078 - T15C

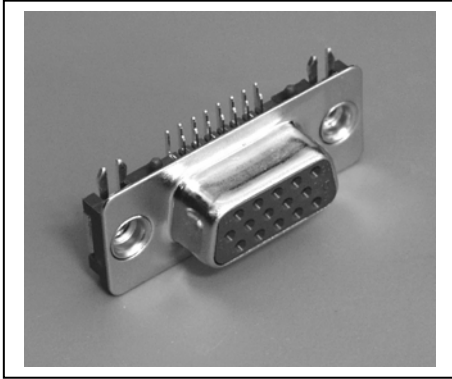


T = Contact Plating

- T = 3. Gold flash over 50μ" nickel.
- T = 4. 10μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel

C = Hardware Options

- C = 1. Riveted ground hooks pre-loaded #4.40 UNC Hex screws (standard)
- C = 0. Riveted ground hooks with #4.40 UNC open

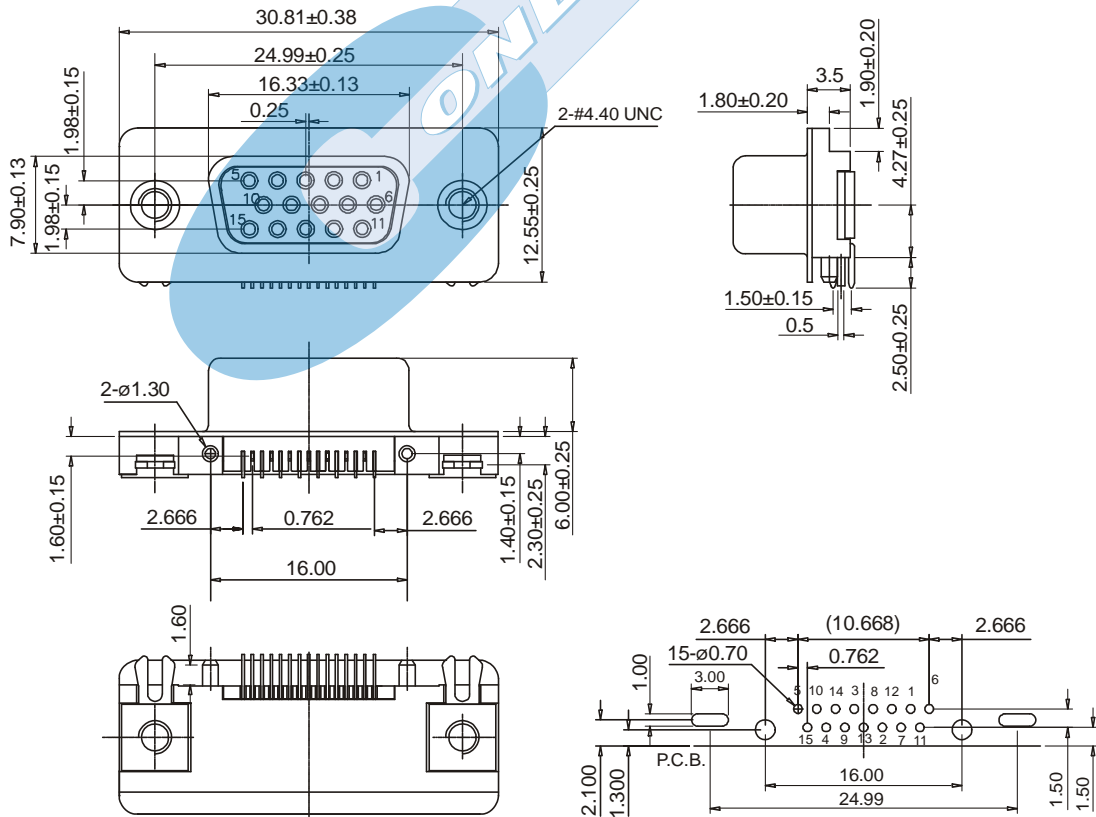

RECOMMENDED HOLE PATTERN