

R/ANGLE HIGH DENSITY D-SUB RECEPTACLE



8085 SERIES. For PCB Mount. Right Angle High Density D-Sub Receptacle

Features

- Available in 15, 26, 44 and 62 circuits
- Insulator Material: Glass filled polyester UL 94V-0
- Contact Material: Brass
- Different plating options are available
- Shell Material: Steel, tin plated as standard
- Optional: #4-40 UNC hexagonal standoff or clinch nuts
- Other options: Hoods, mounting screw and accessories
- For other options consult the Sales Office

Dimensional Information

Ordering and Dimensional Information


Circuit Size	Part Number	Dimensions				
		A	B	C	D	E
15	8085 - T15C	16.33 (0.643)	24.99 (0.984)	30.81 (1.213)	2.29 (0.090)	7.67 (0.120)
26	8085 - T26C	24.66 (0.971)	33.32 (1.312)	39.14 (1.541)	2.29 (0.090)	6.99 (0.275)
44	8085 - T44C	38.38 (1.511)	47.04 (1.852)	53.04 (2.088)	2.29 (0.090)	6.99 (0.275)
62	8085 - T62C	54.84 (2.159)	63.50 (2.500)	69.32 (2.729)	2.41 (0.095)	7.07 (0.278)

T = Contact Plating


- T = 3. Gold flash over 50μ" nickel.
- T = 4. 10μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel

C = Hardware Options


- C = 1. Riveted ground hooks pre-loaded #4.40 UNC Hex screws (standard)
- C = 0. Riveted ground hooks with #4.40 UNC open

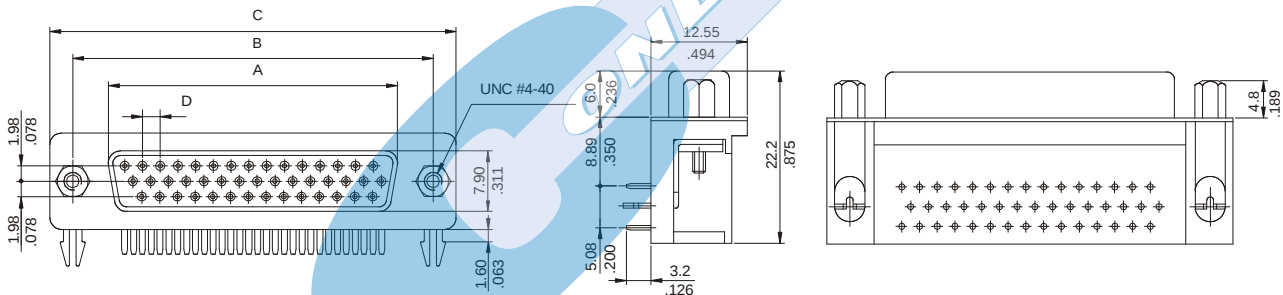

15 CIRCUITS




26 CIRCUITS

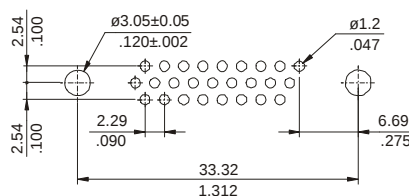

RECOMMENDED HOLE PATTERN

44 CIRCUITS

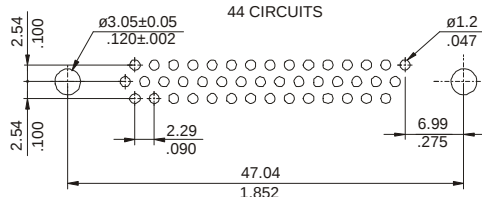

62 CIRCUITS

