

RIGHT ANGLE FEMALE CONNECTOR SUB-D



8095 SERIES. For PCB Solder. Slim.

Features

- Available in 9 circuits
- Insulator Material: Glass filled polyester UL 94V-0
- Contact Material: Stamped Brass
- Rear Part completely insulated
- Metal shell; Tin plated
- Available in different plating options
- The standard version includes: clip, grounding tap L2 and clinch nut 4-40 UNC
- For further options, please contact our Sales Department

Dimensional Information

Ordering and Dimensional Information

Circuit Size	Part Number
9	8095 – T09C
25	8095 – T25C

T = Platings of the Pins



- T = 3. Gold flash over 1.27 μ Ni.
- T = 4. 0.25 μ Gold over 1.27 μ Ni.
- T = 5. 0.50 μ Gold over 1.27 μ Ni.
- T = 6. 0.75 μ Gold over 1.27 μ Ni.

C = Connector options



- C = 1. Standard version with grounding tap L2 and clinch nut 4-40 UNC mounted
- C = 0. Standard version with grounding tap L2 Inserted nut 4.40 UNC w/o hexagonal nut

(Recommended Finish)

9 CIRCUITOS

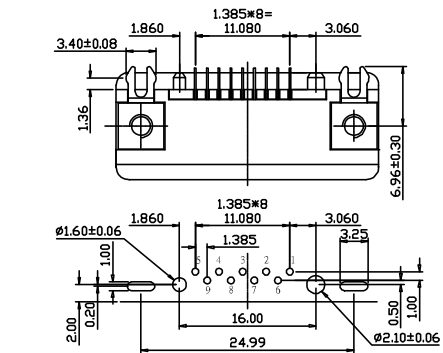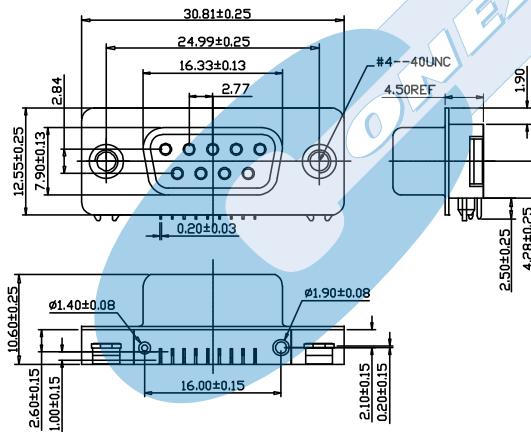

25 CIRCUITOS

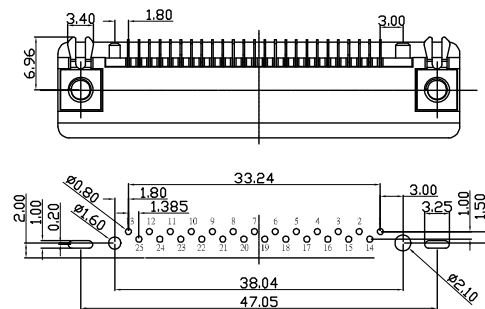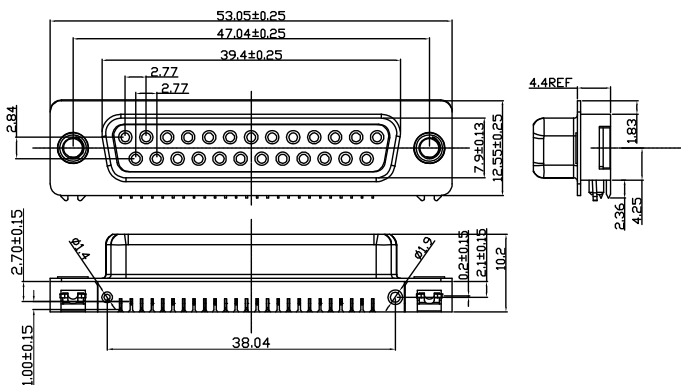

RECOMMENDED PCB LAYOUT

