
# SINGLE ROW VERTICAL PIN HEADER




### **General Features**

- Available in 2 through 40 circuits
- 0.60 round pin in contact area
- With different plating options

### Materials

- Insulator: PPS black + 30% GF UL 94 V-0
- Contact: Brass
- Operating temperature. -40°C to +105°C
- RoHS compliant

## **Dimension Information**

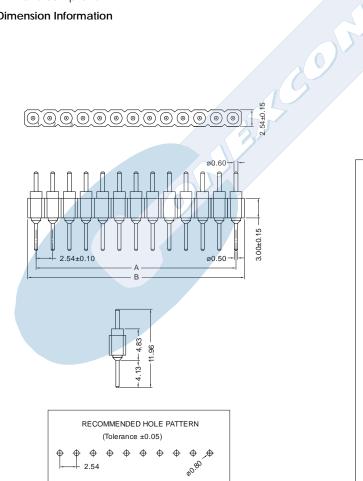

### **Electrical Features**


- Voltage rating: < 250V</li>
- Current rating: < 3 A
- Contact resistance: < 10 mΩ</li>
- Dielectric withstanding Voltage: 1000 V AC/minute

ONEXCON

Insulation resistance: >1000 MΩ

## **Mechanical Features**

- Pin retention force to insulator: > 0.80 Kgf
- Durability: 500 Cycles



#### Ordering Information: Т-8390 -1 XX-1 2 3 4 1. Connector Series 2. (T) Contact Plating • T = 3. gold flash over 30-50µ" Ni overall **Recommended Finish** T = 15. 15µ" selec. gold over 30-50µ" Ni overall T = 16. 30µ" selec. gold over 30-50µ" Ni overall

## 3. (XX) Number of circuits

• Available in 2 through 40 circuits

Dimensions: (In mm.)

- $A = 2.54 \text{ x} (XX^*-1)$  $\mathbf{B} = 2.54 \text{ x} (XX^*) + 0.41$
- \* XX (Number of circuits)