



- ✦ MATERIAL: NYLON 66(UL)
- ✦ FLAME CLASS :94V-2
- ✦ COLOR:NATURAL
- ✦ UNIT:mm




STYLE 1

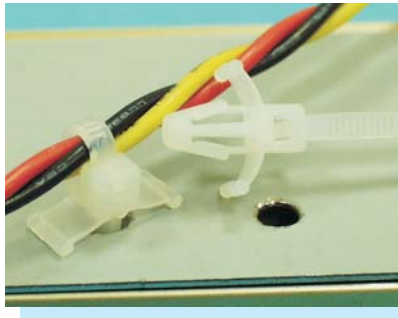

STYLE 2

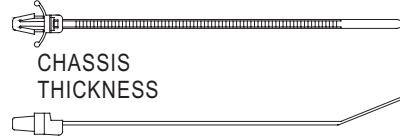



STYLE 3

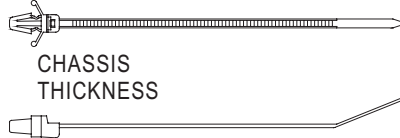

PART NO	Approx Length mm (in)	Approx. Width mm (in)	Max. Bundle Dia. mm (in)	Min.LOOP Tensile Strength kgs.(lbs.)	Hole Diameter CHASSIS	Max. Panel THICKNESS	STYLE	PACKAGE
GTP-130ST	132(5.12)	4.8(0.19)	25(0.98)	22.2(50)	6.4(0.252)	3.2(0.126)	3	1000
GTP-170ST	175(6.69)		38(1.50)					
GTP-190ST	200(7.68)		45(1.77)					
GTP-110M	110(4.33)	2.5(0.10)	22(0.87)	8.1(18)	4.8~5.0 (0.189)~(0.189)	0.8~2.4 (0.03)~(0.09)	2	
GTP-110MA								
GTP-130I	130(5.12)	3.2(0.13)	28(1.10)	13.6(30)	4.0(0.157)	1.0~2.0	3	
GTP-150I	150(5.91)	3.6(0.14)	32(1.26)		5.2(0.205)	1.0~2.8	1	
GTP-200ST	200(7.87)	4.8(0.19)	46(1.81)		22.2(50)	6.3(0.248)		3.6(0.141)
Releasable Cable Tie								
GTRP-130I	130(5.12)	3.2(0.13)	28(1.10)	13.6(30)			3	1000

5

- ✦ MATERIAL: NYLON 66(UL)
- ✦ FLAME CLASS :94V-2
- ✦ COLOR:BLACK
- ✦ UNIT:mm

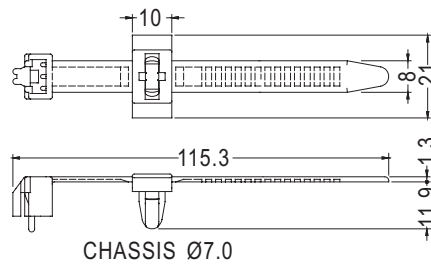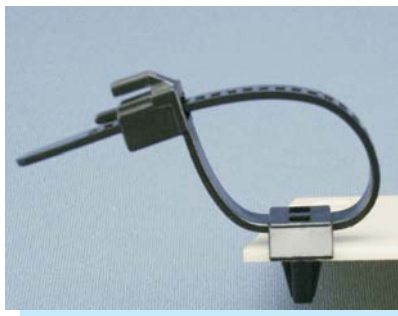

PART NO	PACKAGE
STC-115	200