



- MATERIAL:PC(UL)/NYLON 66 (UL)
- FLAME CLASS:94V-2
- COLOR:NATURAL
- UNIT:mm

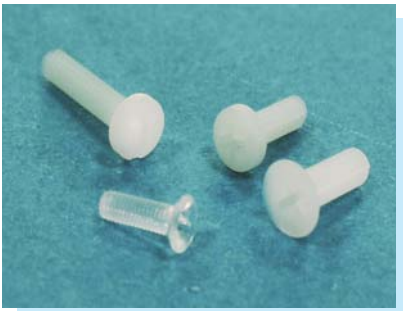

| PART NO | A | B | C | D | PACKAGE |
|------------|------|-----|------|------------|---------|
| M2-3 | 3.3 | 1.4 | 3.0 | M2X0.4P | 2000 |
| M2-4 | | | 4.0 | | |
| M2-5 | | | 5.0 | | |
| M2-6 | | | 6.0 | | |
| M2-6.5 | | | 6.5 | | |
| M2-8 | | | 8.0 | | |
| M2-10 | | | 10.0 | | |
| M2-12 | | | 12.0 | | |
| M2.6-4 | 4.3 | 1.5 | 4.0 | M2.6X0.45P | |
| M2.6-5 | | | 5.0 | | |
| M2.6-6 | | | 6.0 | | |
| M2.6-8 | | | 8.0 | | |
| M2.6-10 | | | 10.0 | | |
| M3-4 | 5.5 | 2.1 | 4.0 | M3X0.5P | 1000 |
| M3-5 | | | 5.0 | | |
| M3-6 | | | 6.0 | | |
| M3-8 | | | 8.0 | | |
| M3-10 | | | 10.0 | M3X0.5P | 2000 |
| M3-12 | | | 12.0 | | |
| M3-15 | | | 15.0 | | |
| M3-17 | | | 17.0 | | |
| M3-18 | | | 18.0 | | |
| M3-20 | | | 20.0 | | |
| M3-25 | | | 25.0 | | |
| M4-6 | | | 7.0 | | |
| M4-8 | 8.0 | | | | |
| M4-10 | 10.0 | | | | |
| M4-12 | 12.0 | | | | |
| M4-14 | 14.0 | | | | |
| M4-16 | 16.0 | | | | |
| M4-20 | 20.0 | | | | |
| M4-25 | 25.0 | | | | |
| M4-30 | 30.0 | | | | |
| M4-35 | 35.0 | | | | |
| M5-20 | 9.1 | 3.6 | 20.0 | M5X0.8P | |
| R440-6 | 5.2 | 2.4 | 6.4 | 4-40 UNC | 2000 |
| R440-8 | | | 8.0 | | |
| R440-9 | | | 9.5 | | |
| R440-12 | | | 12.7 | | |
| R440-15 | | | 15.5 | | |
| R440-4SNV0 | 5.8 | 1.8 | 4.75 | | 1000 |
| R632-6 | 6.7 | 2.5 | 6.35 | 6-32 UNC | 2000 |
| R632-8 | | | 8.0 | | |
| R632-9 | | | 9.5 | | |
| R632-12 | | | 12.7 | | |
| R632-15 | | | 15.9 | | |
| R632-19 | | | 19.1 | | |